


# WINDFLOWER 60" Ceiling Fan

FR-W1815-60L

## MODERN FORMS SMART FANS

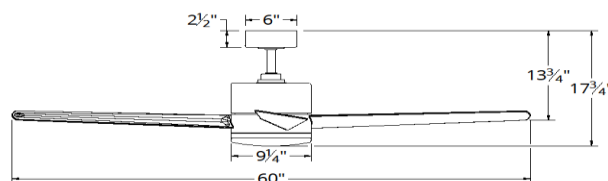

### PRODUCT DESCRIPTION

As bold and beautiful as a classic Holland windmill, this contemporary twelve-blade design is perfect for mid-sized and larger spaces with its 60 inch or 80 inch blade sweeps. Control everything from the palm of your hand with our Wi-Fi-connected Modern Forms app- no one else in the industry can match this combination of style and intuitive technology. Available in three sleek finishes, Windflower makes life easier and more beautiful every day.

### SPECIFICATIONS

**Construction:** Aluminum  
**Blade:** 12° Pitch, 60" sweep, ABS  
**Downrod:** 1" O.D. x 6"H included  
**Mounting Slope:** Up to 30°  
**Lead Wire:** 80"  
**Hanging Weight:** 34.5 lbs  
**Total Power:** 72.5W  
**Standards:** ETL/cETL Wet Location listed

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Optional LED light kit included
- Includes RF wall control
- Additional RF wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

### LIGHT KIT PERFORMANCE

**Light Source:** LED  
**Light Wattage:** 23.5W  
**Dimming:** Integrated  
**Color Temperature:** 3000K  
**Rated Life:** 50,000 Hours  
**Standards:** Title 24 JA8-2016 compliant

### ESTIMATED AIR PERFORMANCE

**Airflow:** 8840 cubic ft per minute on high  
**Power:** 49 watts on high  
**Airflow Efficiency:** 180 cubic ft per minute per watt  
**Revolutions Per Minute:** 128 RPMs on high/84 RPMs on average

### WIRELESS PERFORMANCE

**RF Pairing Distance:** Up to 30 ft from fan  
**Wi-Fi Range:** Up to 150 ft\*

### ORDER NUMBER

Model	LED Lumens	Delivered Lumens	Housing		Blade	
FR-W1815-60L	2041	1080	<b>GH</b>	<i>Graphite</i>	<b>DW</b>	<i>Dark Walnut</i>
			<b>MB</b>	<i>Matte Black</i>	<b>WG</b>	<i>Weathered Gray</i>
			<b>OB</b>	<i>Oil Rubbed Bronze</i>	<b>DK</b>	<i>Distressed Koa</i>

Example: **FR-W1815-60L-GH/WG**

\*Results may vary based on application and surroundings.



modernforms.com  
 Phone (866) 810.6615  
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
 44 Harbor Park Drive  
 Port Washington, NY 11050

Central Distribution Center  
 1600 Distribution Ct  
 Lithia Springs, GA 30122






Western Distribution Center  
 1750 Archibald Avenue  
 Ontario, CA 91760

# WINDFLOWER 60" Ceiling Fan

FR-W1815-60L

MODERN FORMS  
SMART FANS

## OPTIONAL ACCESSORIES

	<b>RF Wall Control</b>  <b>F-WC</b>	<b>WT</b> White	Control fan speed, light brightness and switch between Summer and Winter Modes from up to 30 ft away. One RF Wall control comes standard with each Modern Forms Smart fan.
	<b>Wi-Fi Touch Panel Wall Control</b>  <b>F-TS</b>	<b>BK</b> Black <b>WT</b> White	Sold separately. Android tablet comes pre-loaded with Modern Forms app, Wi-Fi range up to 150 ft from router. Results may vary based on application/surroundings.
	<b>Downrod</b>  <b>XF-12</b> 12in <b>XF-18</b> 18in <b>XF-24</b> 24in <b>XF-36</b> 36in <b>XF-48</b> 48in <b>XF-60</b> 60in <b>XF-72</b> 72in	<b>AS</b> Automotive Silver <b>BZ</b> Bronze <b>CFI</b> Carbon Fiber** <b>DW</b> Dark Walnut <b>GB</b> Gloss Black <b>GH</b> Graphite <b>GW</b> Gloss White <b>MB</b> Matte Black <b>MW</b> Matte White <b>OB</b> Oil Rubbed Bronze <b>SS</b> Stainless Steel <b>TT</b> Titanium Silver	All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
	<b>Downrod Couplers</b>  <b>XF-I</b>		Connects two downrods together.
	<b>Sloped Ceiling Kit</b>  <b>XF-SCK</b>		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: RF Wall Control - **F-WC-WT**, Wi-Fi Touch Panel - **F-TS-WT**, Downrod - **XF-12-BZ**, Downrod Coupler - **XF-I-BZ**, Sloped Ceiling Kit - **XF-SCK-DW**

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire.

\*\*Carbon Fiber downrods available in 12", 18", 24" and 36"

## SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope Pitch	1/12 pitch	2/12 pitch	3/12 pitch	4/12 pitch	5/12 pitch	6/12 pitch	7/12 pitch	8/12 pitch	9/12 pitch	10/12 pitch	11/12 pitch	12/12 pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

modernforms.com  
Phone (866) 810.6615  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760