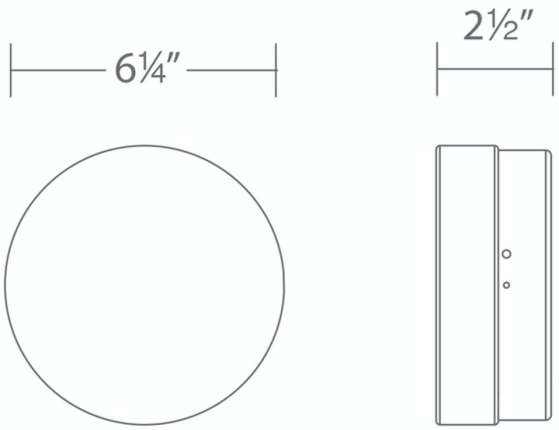

FM-W44806

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Pi

FM-W44806

PRODUCT DESCRIPTION

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrialrefinement. A user-friendly twist lock mechanism makes installation a snap. As for illumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

FEATURES

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K,3000K,2700K
CRI	90
Construction	Weather-resistant 316 stainless steel body with acrylic shade

REPLACEMENT PARTS

-

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-W44806 6"	❍ 2700K	❍ BK Black	10.3W	878	574
	❍ 2700K	❍ SS Stainless Steel	10.3W	878	574
	❍ 3000K	❍ BK Black	10.3W	790	574
	❍ 3000K	❍ SS Stainless Steel	10.3W	790	574
	❍ 3500K	❍ BK Black	10.3W	800	574
	❍ 3500K	❍ SS Stainless Steel	10.3W	800	574

Example: **FM-W44806-35-SS**

For custom requests please contact customs@modernforms.com

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Pi

FM-W44809

PRODUCT DESCRIPTION

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illlumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

FEATURES

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- FM-W44806 doesn't qualified for Energy Star
- 277V option available for special order.

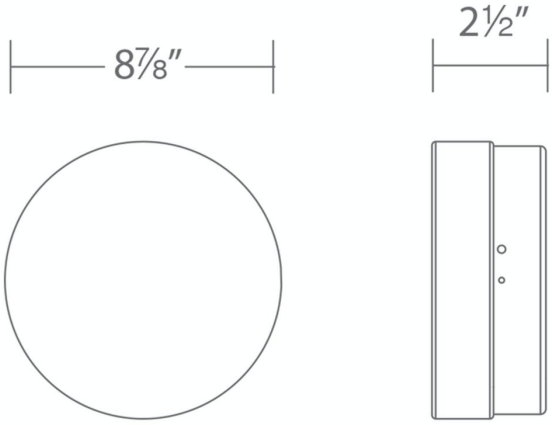

FM-W44809

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K,2700K,3000K
CRI	90
Construction	Weather-resistant 316 stainless steel body with acrylic shade

REPLACEMENT PARTS

-

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-W44809 9"	❍ 2700K	❍ BK Black	16.6W	1571	1070
	❍ 2700K	❍ SS Stainless Steel	16.6W	1571	1070
	❍ 3000K	❍ BK Black	16.6W	1400	997
	❍ 3000K	❍ SS Stainless Steel	16.6W	1400	997
	❍ 3500K	❍ BK Black	16.6W	1542	1082
	❍ 3500K	❍ SS Stainless Steel	16.6W	1542	1082

Example: **FM-W44809-35-SS**

•For 277V special order, add an "F" before the finish: FM-W44809F-35-BK

For custom requests please contact customs@modernforms.com

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Pi

FM-W44812

PRODUCT DESCRIPTION

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illlumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

FEATURES

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- Option to pre-select color temperature or adjust in the field
- FM-W44806 doesn't qualified for Energy Star
- 277V option available for special order.

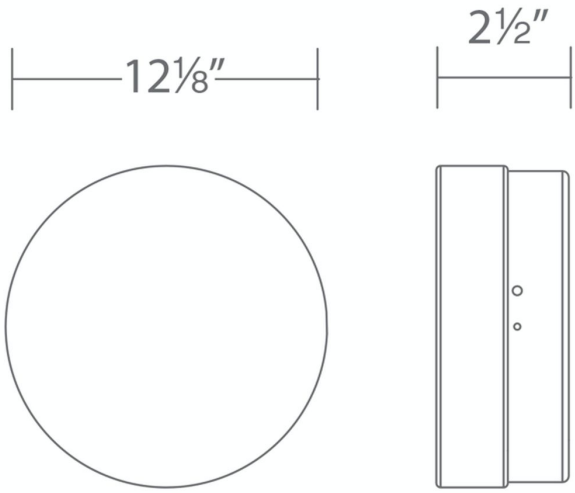

FM-W44812

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K,2700K,3000K
CRI	90
Construction	Weather-resistant 316 stainless steel body with acrylic shade

REPLACEMENT PARTS

-

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-W44812 12"	❍ 2700K	❍ BK Black	27.4W	2566	1482
	❍ 2700K	❍ SS Stainless Steel	27.4W	2566	1482
	❍ 3000K	❍ BK Black	27.4W	2315	1495
	❍ 3000K	❍ SS Stainless Steel	27.4W	2315	1495
	❍ 3500K	❍ BK Black	27.4W	2400	1550
	❍ 3500K	❍ SS Stainless Steel	27.4W	2400	1550

Example: **FM-W44812-35-SS**

•For 277V special order, add an "F" before the finish: FM-W44812F-35-SS

For custom requests please contact customs@modernforms.com

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Pi

FM-W44815

PRODUCT DESCRIPTION

This brand-new design in durable stainless steel handles the outdoor elements with ease, while the sleek polished hardware also gives interiors a welcome touch of industrial refinement. A user-friendly twist lock mechanism makes installation a snap. As for illlumination, the finely crafted diffuser enhances the brightness for a beautiful mix of task and ambient light.

FEATURES

- ACLED driverless technology
- Weather-resistant 316 stainless steel body
- Lightweight injection-molded acrylic diffuser enhances brightness
- Easy twist-lock installation prevents slippage with no visible hardware
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Compact 3CCT switch installs within the junction box
- 277V option available for 9", 12" and 15" only (special order), not available for 6"
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)
- FM-W44806 doesn't qualified for Energy Star

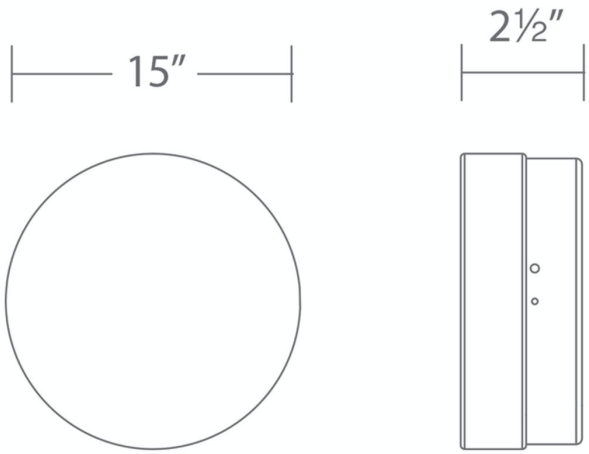

FM-W44815

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K,3500K
CRI	90
Construction	Weather-resistant 316 stainless steel body with acrylic shade

REPLACEMENT PARTS

-

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-W44815 15"	❍ 3000K	❍ BK Black	31.3W	2745	1773
	❍ 3000K	❍ SS Stainless Steel	31.3W	2745	1773
	❍ 3500K	❍ BK Black	31.3W	2980	1838
	❍ 3500K	❍ SS Stainless Steel	31.3W	2980	1838

Example: **FM-W44815-35-SS**

For custom requests please contact customs@modernforms.com