



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Lithium

WS-W12809

PRODUCT DESCRIPTION


A minimal form bolstered by die-cast aluminum hardware, Lithium is the epitome of versatility. An extruded acrylic diffuser softens the light for perfect, long-lasting illumination. The cutting-edge LED array within is factory sealed under tempered glass to allow mounting versatility. Mount it vertically or horizontally, inside or out. It looks good everywhere.

FEATURES

- ACLED driverless technology
- 277V option available for special order.
- Extruded acrylic diffuser

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 4000K
CRI	90
Construction	Die-cast aluminum, extruded acrylic diffuser

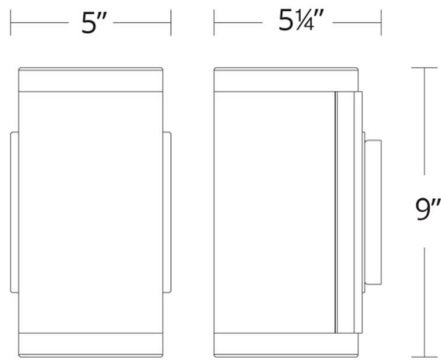

WS-W12809

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W12809 9"	3000K	AL Brushed Aluminum	10W	776	549
		BK Black	10W	776	549
	4000K	AL Brushed Aluminum	10W	889	573
		BK Black	10W	889	573

Example: **WS-W12809-40-BK**

•For 277V special order, add an "F" before the finish: WS-W12809F-30-AL

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Lithium

WS-W12816

PRODUCT DESCRIPTION


A minimal form bolstered by die-cast aluminum hardware, Lithium is the epitome of versatility. An extruded acrylic diffuser softens the light for perfect, long-lasting illumination. The cutting-edge LED array within is factory sealed under tempered glass to allow mounting versatility. Mount it vertically or horizontally, inside or out. It looks good everywhere.

FEATURES

- ACLED driverless technology
- 277V option available for special order.
- Extruded acrylic diffuser

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 4000K
CRI	90
Construction	Die-cast aluminum, extruded acrylic diffuser

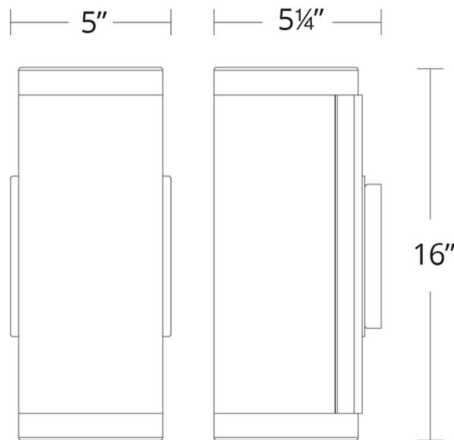

WS-W12816

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W12816 16"	3000K	AL Brushed Aluminum	20W	1683	1326
	3000K	BK Black	20W	1683	1326
	4000K	AL Brushed Aluminum	20W	1719	1443
	4000K	BK Black	20W	1719	1443

Example: **WS-W12816-40-BK**

•For 277V special order, add an "F" before the finish: WS-W12816F-30-AL

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Lithium

WS-W12824

PRODUCT DESCRIPTION


A minimal form bolstered by die-cast aluminum hardware, Lithium is the epitome of versatility. An extruded acrylic diffuser softens the light for perfect, long-lasting illumination. The cutting-edge LED array within is factory sealed under tempered glass to allow mounting versatility. Mount it vertically or horizontally, inside or out. It looks good everywhere.

FEATURES

- ACLED driverless technology
- 277V option available for special order.
- Extruded acrylic diffuser

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 4000K
CRI	90
Construction	Die-cast aluminum, extruded acrylic diffuser

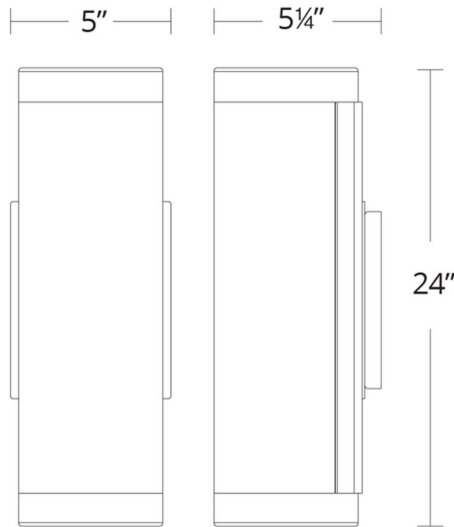

WS-W12824

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W12824 24"	3000K	AL Brushed Aluminum	37W	3132	2735
	3000K	BK Black	37W	3132	2735
	4000K	AL Brushed Aluminum	37W	3256	2740
	4000K	BK Black	37W	3256	2740

Example: **WS-W12824-40-BK**

•For 277V special order, add an "F" before the finish: WS-W12824F-40-BK

For custom requests please contact customs@modernforms.com