



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Zelda

PD-56729

PRODUCT DESCRIPTION

Inspired by ocean ripples, the Zelda Pendant by Modern Forms brings a fluid, yet soothing ambiance to your interior decor. Its ringed body, made of Die Cast Aluminum, is artisan-sculpted to resemble gently flowing water which appears to run around the fixture in constant motion. An Opal glass diffuser sits flush at the base of the ring, providing a soft, low-profile light courtesy of an integrated LED source.

FEATURES


- 277V option available for special order.
-
- Downward illumination
- Can be mounted on a sloped ceiling

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-10%
Color Temp	3000K
CRI	90
Construction	Die-cast aluminum

REPLACEMENT PARTS

RPL-GLA-56729-01 - Glass

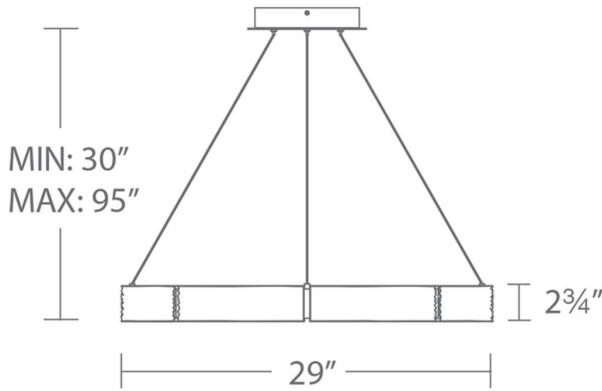

PD-56729

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-56729 29"	3000K	PN Polished Nickel	48.6W	2388	1236

Example: **PD-56729-PN**

•For 277V special order, add an "F" before the finish: PD-56729F-PN

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Zelda

PD-56748

PRODUCT DESCRIPTION

Inspired by ocean ripples, the Zelda Pendant by Modern Forms brings a fluid, yet soothing ambiance to your interior decor. Its ringed body, made of Die Cast Aluminum, is artisan-sculpted to resemble gently flowing water which appears to run around the fixture in constant motion. An Opal glass diffuser sits flush at the base of the ring, providing a soft, low-profile light courtesy of an integrated LED source.

FEATURES


- 277V option available for special order.
-
- Downward illumination
- Can be mounted on a sloped ceiling
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 48" format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Die-cast aluminum

REPLACEMENT PARTS

RPL-GLA-56748-01 - Glass

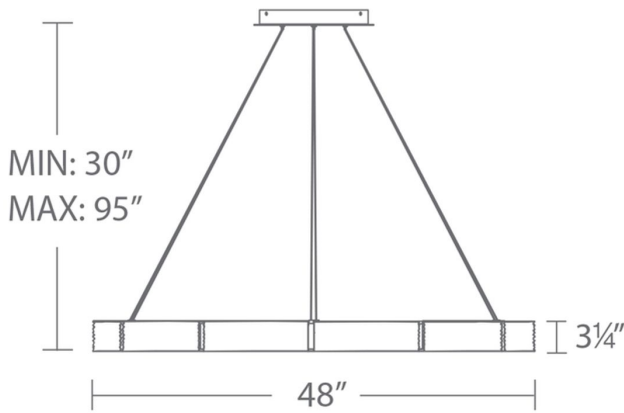

PD-56748

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-56748 48"	3000K	PN Polished Nickel	94W	3582	3060

Example: **PD-56748-PN**

•For 277V special order, add an "F" before the finish: PD-56748F-PN

For custom requests please contact customs@modernforms.com