



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Swing

PD-52512

FEATURES


- ACLED driverless technology
- Hand-cut faceted crystal
- Up and down illumination
- Slope ceiling adaptable. Hang straight swivels up to 90 degrees
- Three 12" and one 6" down rods included (additional sold separately)

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	3000K
CRI	90
Construction	Aluminum and crystal

REPLACEMENT PARTS

RPL-GLA-52512-01 - Top Glass
RPL-GLA-52512-02 - Bottom Glass Plate
RPL-ROD-IN06-CH - 6" Rod
RPL-ROD-IN12-CH - 12" Rod

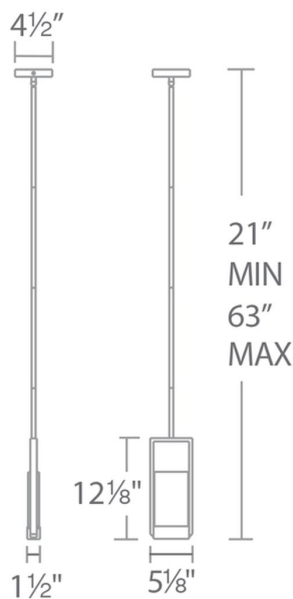

PD-52512

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-52512 12"	3000K	CH Chrome	11W	830	535

Example: **PD-52512-CH**

For custom requests please contact customs@modernforms.com