



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# The Ring

PD-55024

**PRODUCT DESCRIPTION**


Simple yet refined. An elevated ring suspended above by its ultra-thin powered cables. Tailored profile and seamless construction.

**FEATURES**

- Driver concealed within the canopy
- Spin-on round canopy with minimal hardware
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

**SPECIFICATIONS**

<b>Rated Life</b>	50000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
<b>Input</b>	120-277V, 50/60Hz
<b>Dimming</b>	ELV, 0-10V, TRIAC
<b>Color Temp</b>	3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with PC diffuser

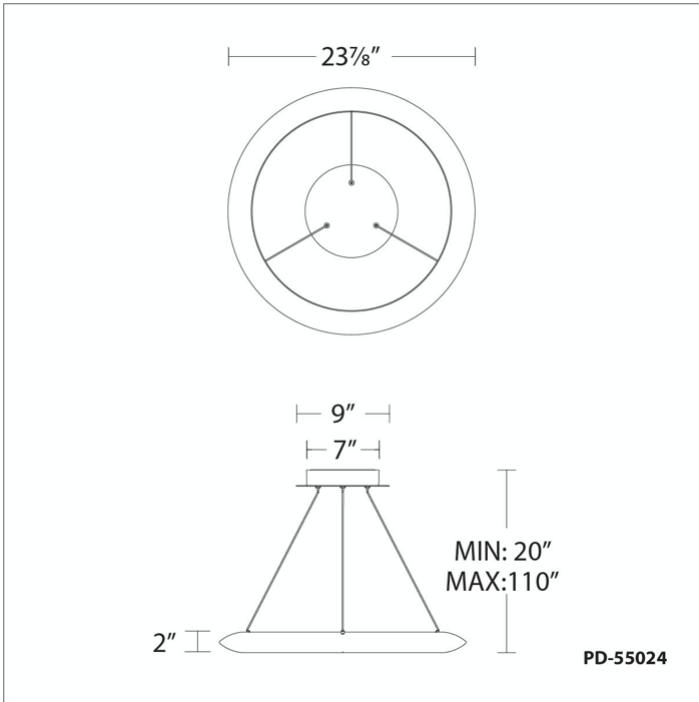

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-55024 24"	2700K	AL Brushed Aluminum	21.6W	1881	1361
	2700K	BK Black	21.6W	1881	1361
	3000K	AL Brushed Aluminum	21.6W	1891	1368
	3000K	BK Black	21.6W	1891	1368
	3500K	AL Brushed Aluminum	21.6W	1985	1436
	3500K	BK Black	21.6W	1985	1436

Example: **PD-55024-35-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# The Ring

PD-55036

**PRODUCT DESCRIPTION**


Simple yet refined. An elevated ring suspended above by its ultra-thin powered cables. Tailored profile and seamless construction.

**FEATURES**

- Driver concealed within the canopy
- Spin-on round canopy with minimal hardware
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

**SPECIFICATIONS**

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277V, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Aluminum body with PC diffuser

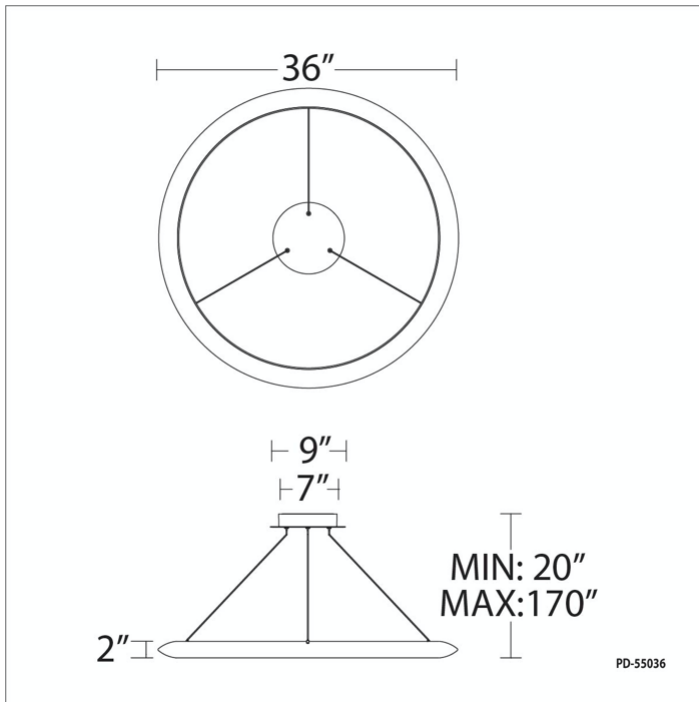

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-55036 36"	2700K	AL Brushed Aluminum	30.1W	2777	2073
	2700K	BK Black	30.1W	2777	2073
	3000K	AL Brushed Aluminum	30.1W	2791	2083
	3000K	BK Black	30.1W	2791	2083
	3500K	AL Brushed Aluminum	30.1W	2931	2187
	3500K	BK Black	30.1W	2931	2187

Example: **PD-55036-35-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# The Ring

PD-55048

**PRODUCT DESCRIPTION**


Simple yet refined. An elevated ring suspended above by its ultra-thin powered cables. Tailored profile and seamless construction.

**FEATURES**

- Driver concealed within the canopy
- Spin-on round canopy with minimal hardware
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K

**SPECIFICATIONS**

<b>Rated Life</b>	50000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
<b>Input</b>	120-277V, 50/60Hz
<b>Dimming</b>	ELV, 0-10V, TRIAC
<b>Color Temp</b>	3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum body with PC diffuser

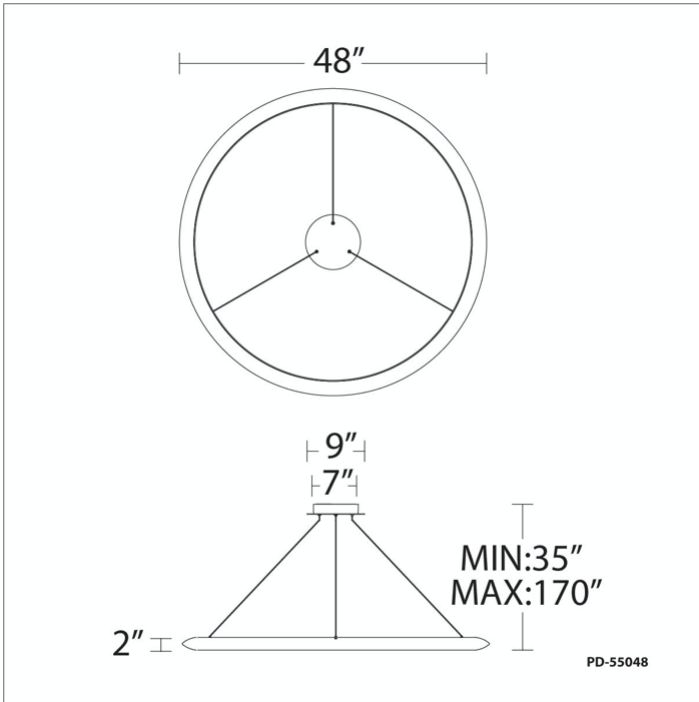

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-55048 48"	2700K	AL Brushed Aluminum	43.9W	3948	3110
	2700K	BK Black	43.9W	3948	3110
	3000K	AL Brushed Aluminum	43.9W	3968	3126
	3000K	BK Black	43.9W	3968	3126
	3500K	AL Brushed Aluminum	43.9W	4167	3282
	3500K	BK Black	43.9W	4167	3282

Example: **PD-55048-35-BK**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)