



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Puck

FM-4514

PRODUCT DESCRIPTION

Celebrate style and performance with this curvaceous LED luminaire featuring a blow molded diffuser to deliver ample lighting with smooth and continuous ELV dimming capabilities. The chrome ring integrates LED arrays for a uniform deliverance without shadows commonly found in conventional flush mounts. Use as wall or ceiling mount with unbridled creativity.

FEATURES


- Driver concealed within the fixture
- Twist-lock installation
- Secondary lens to spread light evenly

SPECIFICATIONS

Rated Life	59000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant,Energy Star 2.0,ADA
Input	120-277V,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K
CRI	90
Construction	Aluminum hardware, acrylic diffuser

REPLACEMENT PARTS

RPL-SHA-4514 - Shade

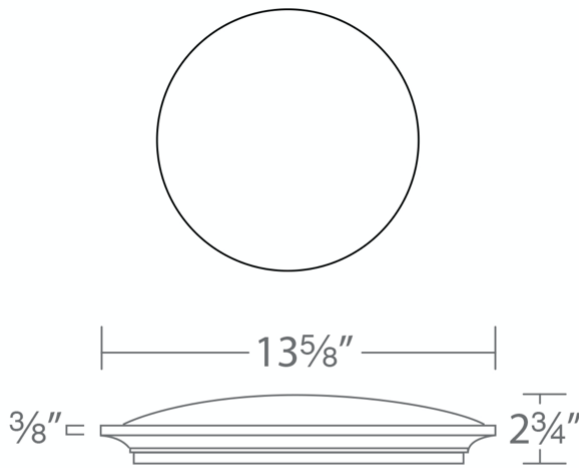


FM-4514-35

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-4514 14"	3500K	BN Brushed Nickel	20W	1500	1464

Example: **FM-4514-35-BN**

For custom requests please contact customs@modernforms.com

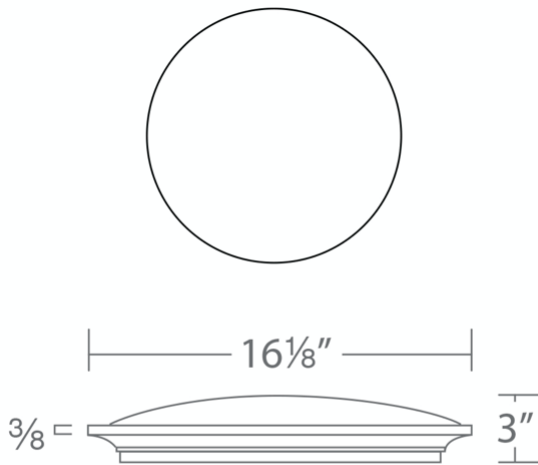

FM-4516-35

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Puck

FM-4516

PRODUCT DESCRIPTION

Celebrate style and performance with this curvaceous LED luminaire featuring a blow molded diffuser to deliver ample lighting with smooth and continuous ELV dimming capabilities. The chrome ring integrates LED arrays for a uniform deliverance without shadows commonly found in conventional flush mounts. Use as wall or ceiling mount with unbridled creativity.

FEATURES

- Driver concealed within the fixture
- Twist-lock installation
- Secondary lens to spread light evenly

SPECIFICATIONS

Rated Life	59000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, Energy Star 2.0, ADA
Input	120-277V, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-5%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K
CRI	90
Construction	Aluminum hardware, acrylic diffuser

REPLACEMENT PARTS

RPL-SHA-4516 - Shade

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-4516 16"	3500K	BN Brushed Nickel	27W	2300	2152

Example: **FM-4516-35-BN**

For custom requests please contact customs@modernforms.com