




Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

**AVAILABLE FINISHES:**



# Ledge

WS-W1408

**PRODUCT DESCRIPTION**


A luminous architectural profile and superior construction make this wall sconce appropriate for transitional and contemporary interiors or exteriors. Options allow for cohesive specifications across residential and commercial interior and exterior applications.

**FEATURES**

- 277V option available for special order.
- CCT option available for special order.
- ACLED driverless technology
- White ceramic silk-screened mitered glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV
<b>Color Temp</b>	3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum with white mitered glass

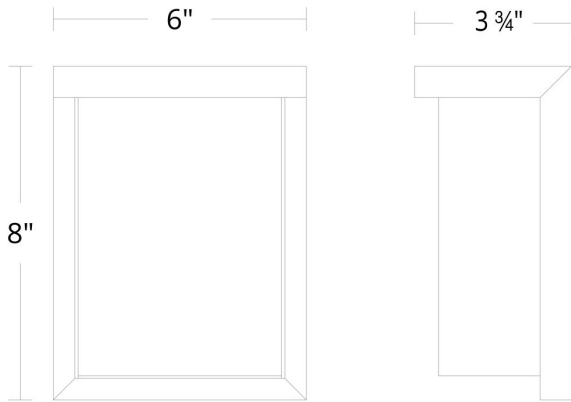

WS-W1408

**REPLACEMENT PARTS**

- RPL-GLA-1408-02 - Inner Glass
- RPL-GLA-1408-01 - Outer Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W1408 8"	2700K	AL Brushed Aluminum	12W	1000	363
	2700K	BK Black	12W	1000	363
	2700K	BZ Bronze	12W	1000	363
	3500K	AL Brushed Aluminum	12W	1000	363
	3500K	BK Black	12W	1000	363
	3500K	BZ Bronze	12W	1000	363
	3000K	AL Brushed Aluminum	12W	1000	363
	3000K	BK Black	12W	1000	363
	3000K	BZ Bronze	12W	1000	363

Example: **WS-W1408-BZ**

•For 277V special order, add an "F" before the finish: WS-W1408F-AL

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Ledge

WS-W1414

**PRODUCT DESCRIPTION**

A luminous architectural profile and superior construction make this wall sconce appropriate for transitional and contemporary interiors or exteriors. Options allow for cohesive specifications across residential and commercial interior and exterior applications.

**FEATURES**


- 277V option available for special order.
- CCT option available for special order.
- ACLED driverless technology
- White ceramic silk-screened mitered glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum with white mitered glass

**REPLACEMENT PARTS**

- RPL-GLA-1414-02 - Inner Glass
- RPL-GLA-1414-01 - Outer Glass

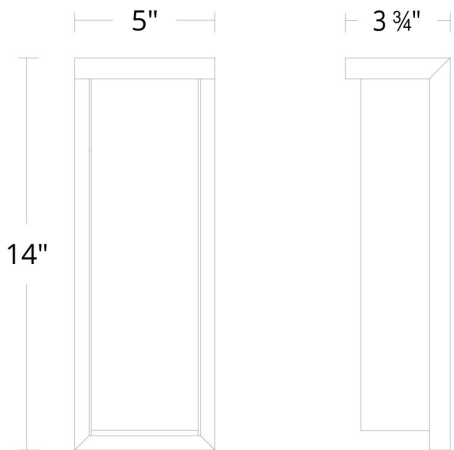

WS-W1414

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W1414 14"	2700K	AL Brushed Aluminum	15W	1400	638
	2700K	BK Black	15W	1400	638
	2700K	BZ Bronze	15W	1400	638
	3500K	AL Brushed Aluminum	15W	1400	638
	3500K	BK Black	15W	1400	638
	3500K	BZ Bronze	15W	1400	638
	3000K	AL Brushed Aluminum	15W	1400	638
	3000K	BK Black	15W	1400	638
	3000K	BZ Bronze	15W	1400	638

Example: **WS-W1414-BZ**

•For 277V special order, add an "F" before the finish: WS-W1414F-AL

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)



Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Ledge

WS-W1420

**PRODUCT DESCRIPTION**

A luminous architectural profile and superior construction make this wall sconce appropriate for transitional and contemporary interiors or exteriors. Options allow for cohesive specifications across residential and commercial interior and exterior applications.

**FEATURES**


- 277V option available for special order.
- CCT option available for special order.
- ACLED driverless technology
- White ceramic silk-screened mitered glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
<b>Input</b>	120 VAC, 50/60Hz
<b>Dimming</b>	ELV
<b>Color Temp</b>	2700K, 3500K, 3000K
<b>CRI</b>	90
<b>Construction</b>	Aluminum with white mitered glass

**REPLACEMENT PARTS**

- RPL-GLA-1420-02 - Inner Glass
- RPL-GLA-1420-01 - Outer Glass

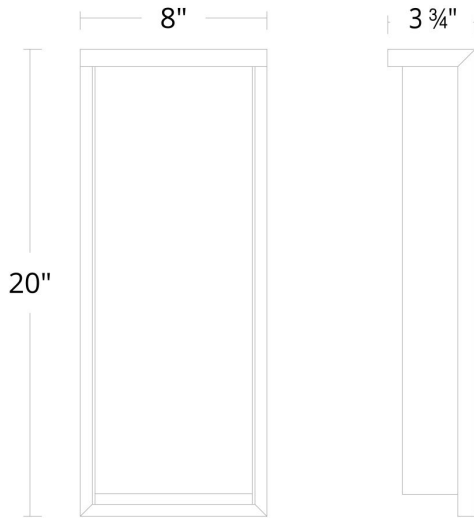

WS-W1420

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W1420 20"	2700K	AL Brushed Aluminum	28W	2000	926
	2700K	BK Black	28W	2000	926
	2700K	BZ Bronze	28W	2000	926
	3500K	AL Brushed Aluminum	28W	2000	926
	3500K	BK Black	28W	2000	926
	3500K	BZ Bronze	28W	2000	926
	3000K	AL Brushed Aluminum	28W	2000	926
	3000K	BK Black	28W	2000	926
	3000K	BZ Bronze	28W	2000	926

Example: **WS-W1420-BZ**

•For 277V special order, add an "F" before the finish: WS-W1420F-AL

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)