


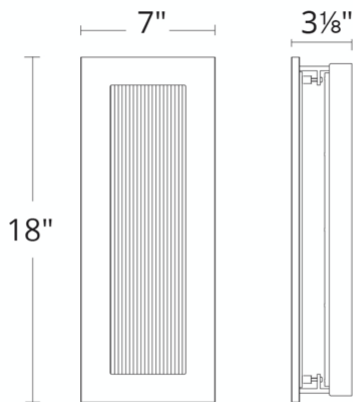

WS-W71618

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Oath

WS-W71618

PRODUCT DESCRIPTION

A transitional design that can preserve continuity across many American architectural styles, from prairie to saltbox to craftsman, Oath promises to elevate exterior décor with its unique blend of geometry, glass and light. Furnished with high-performance LEDs and a durable bronze finish, this versatile sconce can endure any storm outside, shining a light on pathways and entryways outside of hotels, hospitals and homes.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Textured art glass
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum construction with laminated glass

REPLACEMENT PARTS


RPL-GLA-71618-01 - Outer Glass
RPL-GLA-71618-02 - Inner Glass
HDW-WS-W716XX - Hardware Pack

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W71618 18"	3000K	BZ Bronze	11.8W	901	161

Example: **WS-W71618-BZ**

•For 277V special order, add an "F" before the finish: WS-W71618F-BZ

For custom requests please contact customs@modernforms.com

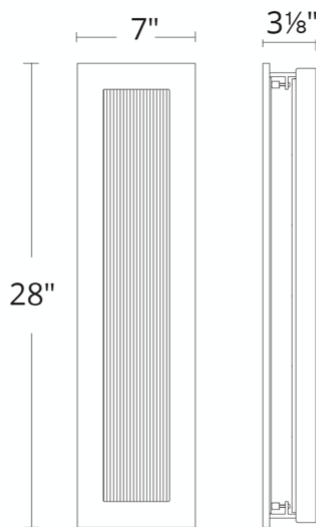

WS-W71628

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Oath

WS-W71628

PRODUCT DESCRIPTION

A transitional design that can preserve continuity across many American architectural styles, from prairie to saltbox to craftsman, Oath promises to elevate exterior décor with its unique blend of geometry, glass and light. Furnished with high-performance LEDs and a durable bronze finish, this versatile sconce can endure any storm outside, shining a light on pathways and entryways outside of hotels, hospitals and homes.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Textured art glass
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model#LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Aluminum construction with laminated glass

REPLACEMENT PARTS

RPL-GLA-71628-01 - Outer Glass
RPL-GLA-71628-02 - Inner Glass
HDW-WS-W716XX - Hardware Pack

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W71628 28"	3000K	BZ Bronze	35.5W	2760	586

Example: **WS-W71628-BZ**

•For 277V special order, add an "F" before the finish: WS-W71628F-BZ

For custom requests please contact customs@modernforms.com