



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cadence

WS-54127

PRODUCT DESCRIPTION

This clever bath bar offers a trifecta of options. A debonair rotatable diffusing wand allows you to direct flattering LED illumination precisely where needed. A range of thoughtfully engineered options include a minimalist installation and round and square decorative plates.

FEATURES


- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Rotate the bar up to 360° to adjust for direct or indirect illumination
- Square and round conversion plates included to accommodate to 4" junction box for added customization
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Driver Dimension	2.8" X 1.3" X 1.2"
Dimming	ELV, 0-10V, TRIAC
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K
CRI	90
Construction	Die cast body, extruded aluminum channel with rotatable PC diffuser

REPLACEMENT PARTS

-

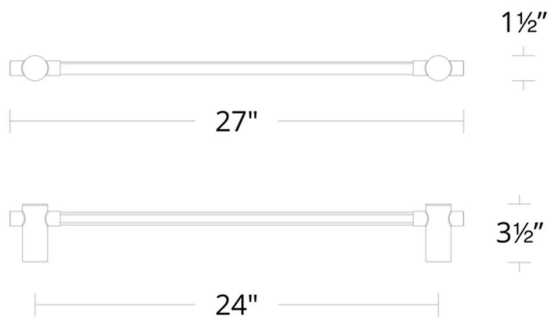

WS-54127

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-54127 27"	3000K	BN Brushed Nickel	11.2W	1088	981

Example: **WS-54127-BN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cadence

WS-54139

PRODUCT DESCRIPTION

This clever bath bar offers a trifecta of options. A debonair rotatable diffusing wand allows you to direct flattering LED illumination precisely where needed. A range of thoughtfully engineered options include a minimalist installation and round and square decorative plates.

FEATURES

- Driver installed within the Junction Box, driver dimension: 2.8" x 1.3" x 1.2"
- Rotate the bar up to 360° to adjust for direct or indirect illumination
- Square and round conversion plates included to accommodate to 4" junction box for added customization
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120-277 VAC,50/60Hz
Driver Dimension	2.8" X 1.3" X 1.2"
Dimming	ELV, 0-10V, TRIAC
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K
CRI	90
Construction	Die cast body, extruded aluminum channel with rotatable PC diffuser

REPLACEMENT PARTS

-



WS-54139

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-54139 39"	3000K	BN Brushed Nickel	14.5W	1438	1284

Example: **WS-54139-BN**

For custom requests please contact customs@modernforms.com