



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Squat

FM-W46204

PRODUCT DESCRIPTION


Rotund ceiling and wall luminaire ideal for placement in covered porches, gazebos and outdoor spaces. Adjustable and versatile, mounts on ceilings and walls for a variety of outdoor lighting applications. Switch from 3000K, 3500K or 4000K color temperature.

FEATURES

- ACLED driverless technology
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Design features an 88° beam angle for the 5" size and a 72° beam angle for the 4" size
- Conversion plate included for 4" junction box
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, Title 24 JA8: 2025 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K, 3500K, 4000K
CRI	90
Construction	Aluminum spun body with glass diffuser

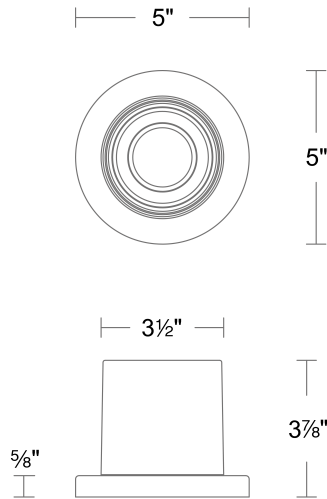


FM-W46204

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W46204 4"	3000K	BK Black	9.5W	863	333
	3000K	WT White	9.5W	863	333
	3500K	BK Black	9.5W	863	368
	3500K	WT White	9.5W	863	368
	4000K	BK Black	9.5W	863	357
	4000K	WT White	9.5W	863	357

Example: **FM-W46204-40-WT**

For custom requests please contact customs@modernforms.com

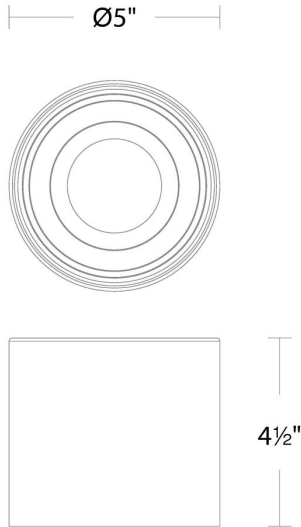

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Squat

FM-W46205

PRODUCT DESCRIPTION

Rotund ceiling and wall luminaire ideal for placement in covered porches, gazebos and outdoor spaces. Adjustable and versatile, mounts on ceilings and walls for a variety of outdoor lighting applications. Switch from 3000K, 3500K or 4000K color temperature.

FEATURES

- ACLED driverless technology
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K
- Design features an 88° beam angle for the 5" size and a 72° beam angle for the 4" size
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	4000K, 3500K, 3000K
CRI	90
Construction	Aluminum spun body with glass diffuser

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-W46205 5"	3000K	BK Black	11.9W	900	607
	3000K	WT White	11.9W	900	607
	3500K	BK Black	11.9W	900	647
	3500K	WT White	11.9W	900	647
	4000K	BK Black	11.9W	900	618
	4000K	WT White	11.9W	900	618

Example: **FM-W46205-40-WT**

For custom requests please contact customs@modernforms.com