



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Barre

WS-68227

PRODUCT DESCRIPTION


A minimalist yet bold bath luminaire that deploys robust, flattering illumination above or alongside a vanity in residential, hospitality and commercial environments.

FEATURES

- ACLED driverless technology
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K,3000K,3500K
CRI	90
Construction	Extruded aluminum body with etched PC diffuser

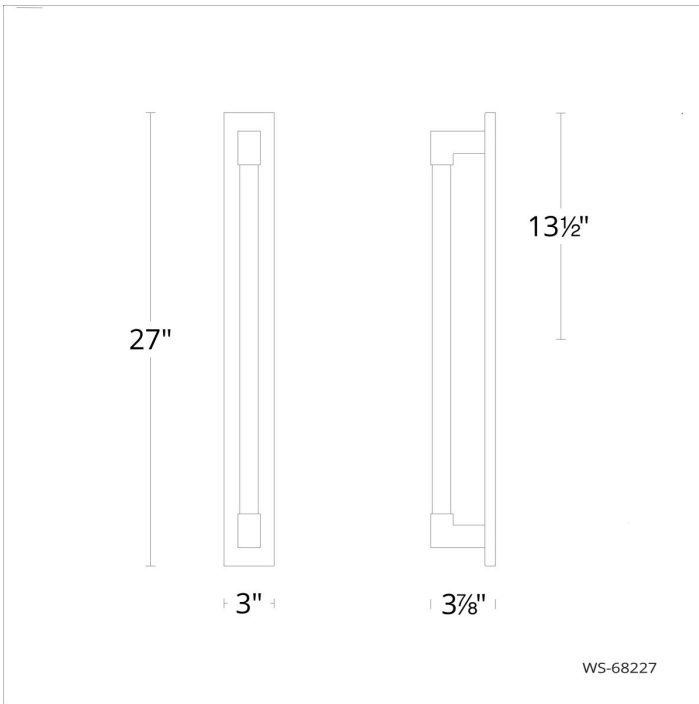

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-68227 27"	2700K	BN Brushed Nickel	17.1W	1597	1312
	3000K	BN Brushed Nickel	17.1W	1730	1417
	3500K	BN Brushed Nickel	17.1W	1789	1467

Example: **WS-68227-35-BN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Barre

WS-68237

PRODUCT DESCRIPTION


A minimalist yet bold bath luminaire that deploys robust, flattering illumination above or alongside a vanity in residential, hospitality and commercial environments.

FEATURES

- ACLED driverless technology
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Extruded aluminum body with etched PC diffuser

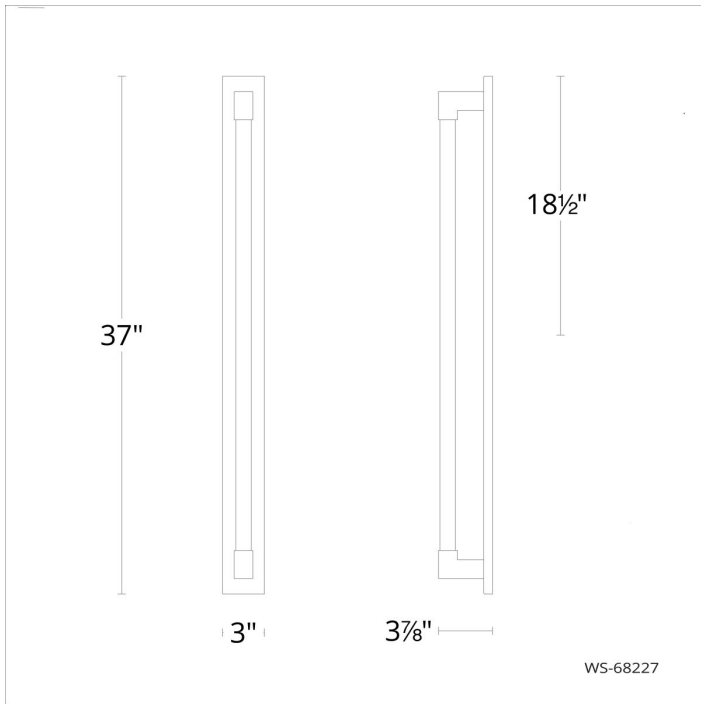

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-68237 37"	2700K	BN Brushed Nickel	22.8W	2182	1775
	3000K	BN Brushed Nickel	22.8W	2369	1919
	3500K	BN Brushed Nickel	22.8W	2465	1999

Example: **WS-68237-35-BN**

For custom requests please contact customs@modernforms.com