Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Flue

WS-W36406

PRODUCT DESCRIPTION

Fundamental geometry. An opaque triangular shade shelters LED light sources, providing diffused downward illumination while protecting the nighttime sky.

FEATURES

- ACLED driverless technology
- Downward illlumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- IDA Dark Sky compliant in color temperatures of 3000K or lower

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Wet Location Listed,IP65,Dark Sky Friendly
Input	120 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-10%
Mounting	Can be mounted on wall vertically or upside down
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Aluminum body with silk screened diffuser

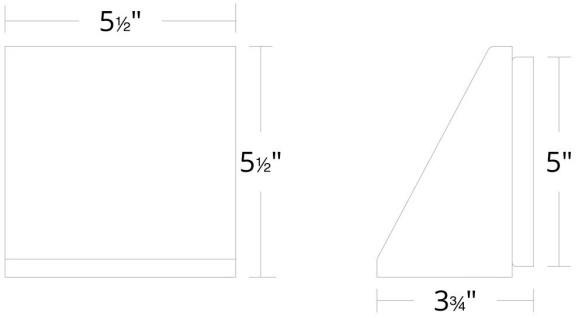

WS-W36406

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ WS-W36406 6"	❍ 2700K	❍ BK Black	12.1W	1000	320
	❍ 3000K	❍ BK Black	12.1W	1000	320
	❍ 3500K	❍ BK Black	12.1W	1000	320
	❍ 4000K	❍ BK Black	12.1W	1000	320

Example: **WS-W36406-40-BK**

For custom requests please contact customs@modernforms.com