



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Montage

PD-54432

PRODUCT DESCRIPTION

Architectural appeal is yours with the Montage pendant light. Cantilevered columns of reclaimed K5 crystal extend from a sturdy frame, creating alluring, 3000K illumination from hidden LEDs.

FEATURES


- Driver concealed within the canopy
- Artisanal reclaimed K5 crystal shade
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel.
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Color Temp	3000K
CRI	90
Construction	Extruded aluminum frame with K5 crystal fused acrylic shade

REPLACEMENT PARTS

- RPL-ROD-IN06-BK-01 - 6" Rod
- RPL-ROD-IN06-BN2-1 - 6" Rod
- RPL-ROD-IN12-BK-01 - 12" Rod
- RPL-ROD-IN12-BN2-1 - 12" Rod

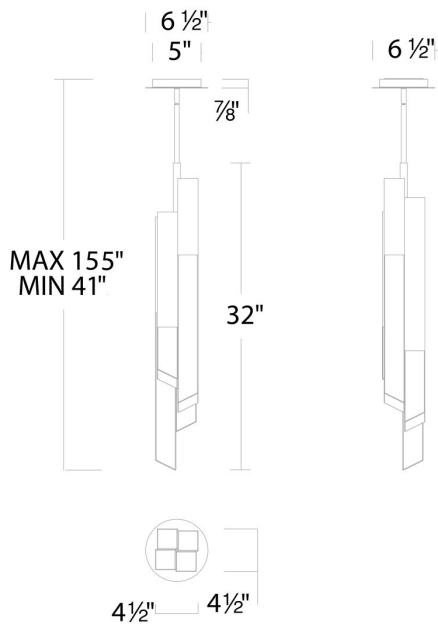

PD-54428

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-54432 32"	3000K 3000K	BK Black BN Brushed Nickel	29.2W 29.2W	1714 1714	1645 1645

Example: **PD-54432-BN**

For custom requests please contact customs@modernforms.com