Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Iconix

WS266620

PRODUCT DESCRIPTION

Geometric Purity. The Iconix Wall Sconce asserts a commanding presence, embodying geometric purity and cultured illumination for the modern bath. Each sconce is an uncompromising marvel of modern transitional design, featuring a distinct combination of clear fluted glass and PC diffuser, meticulously arranged to create an enchanting interplay of texture and light. 4CCT LED light is diffused through these elements, casting a multi-dimensional glow that defines and elevates the space. ICONIX luminaires are charismatic statements of architectural elegance, transforming functional lighting into captivating works of art that resonate with modern sophistication.

FEATURES

- Driver concealed within the canopy
- Clear fluted glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

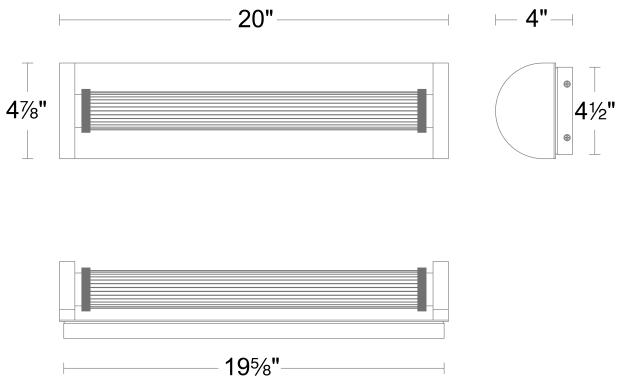

WS266620

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2025 Compliant
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame, clear blown ribbed glass shade, and PC diffuser

REPLACEMENT PARTS

RPL-GLA-266620 - Replacement Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ WS266620 20"	2700K/3000K/3500K/4000K 2700K/3000K/3500K/4000K	❍ AB Aged Brass ❍ PN Polished Nickel	14.9W 14.9W	1138 1138	1115 1115

Example: **WS266620-PN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:

Iconix

WS266628

PRODUCT DESCRIPTION

Geometric Purity. The Iconix Wall Sconce asserts a commanding presence, embodying geometric purity and cultured illumination for the modern bath. Each sconce is an uncompromising marvel of modern transitional design, featuring a distinct combination of clear fluted glass and PC diffuser, meticulously arranged to create an enchanting interplay of texture and light. 4CCT LED light is diffused through these elements, casting a multi-dimensional glow that defines and elevates the space. ICONIX luminaires are charismatic statements of architectural elegance, transforming functional lighting into captivating works of art that resonate with modern sophistication.

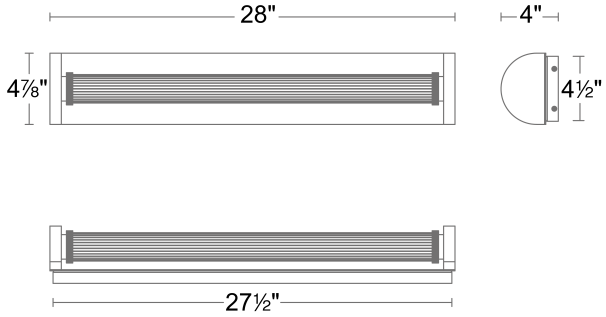

WS266628

FEATURES

- Driver concealed within the canopy
- Clear fluted glass encases an inner PC diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	54000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2025 Compliant
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-5%
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame, clear blown ribbed glass shade, and PC diffuser

REPLACEMENT PARTS

RPL-GLA-266628 - Replacement Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ WS266628 28"	2700K/3000K/3500K/4000K	❍ AB Aged Brass	20.3W	1703	1635
	2700K/3000K/3500K/4000K	❍ PN Polished Nickel	20.3W	1703	1635

Example: **WS266628-PN**

For custom requests please contact customs@modernforms.com