



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



## Cascade

PD-41714L

FEATURES


- Driver concealed within the canopy
- Hand-cut faceted K9 crystal
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

|              |                                  |
|--------------|----------------------------------|
| Rated Life   | 50,000 Hours                     |
| Standards    | ETL, cETL,Damp Location Listed   |
| Input        | 120-277 VAC,50/60Hz              |
| Dimming      | ELV                              |
| Color Temp   | 2700K/3000K/3500K/4000K          |
| CRI          | 90                               |
| Construction | Steel body with crystal diffuser |

REPLACEMENT PARTS

RPL-GLA-41719 - Glass

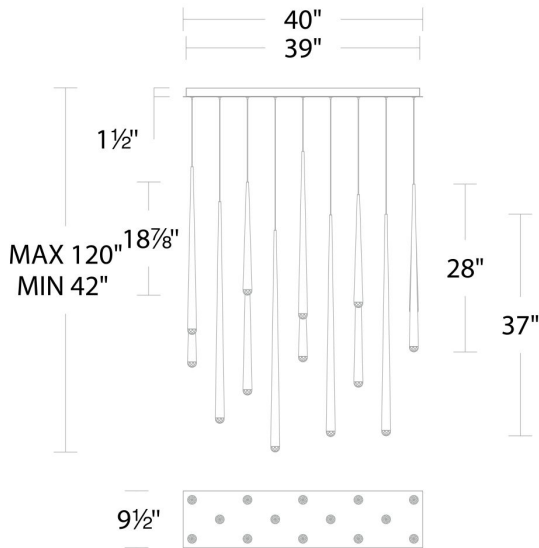

PD-41714L

| Model & Size              | Color Temp & CRI | Watt | Lumens | Finish             |
|---------------------------|------------------|------|--------|--------------------|
| PD-41714L 40" - 14 Lights | 2700K/3000K/     | 98W  | 5254   | AB Aged Brass      |
|                           |                  | 98W  | 5254   | BK Black           |
|                           |                  | 98W  | 5254   | PN Polished Nickel |
|                           | 90               |      |        |                    |
|                           | 2700K/3000K/     |      |        |                    |
|                           | 90               |      |        |                    |
|                           | 2700K/3000K/     |      |        |                    |
|                           | 90               |      |        |                    |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

Example: **PD-41714L-PN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

\* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right





Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



## Cascade

PD-41723L

FEATURES


- Driver concealed within the canopy
- Hand-cut faceted K9 crystal
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 23 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

|              |                                  |
|--------------|----------------------------------|
| Rated Life   | 50,000 Hours                     |
| Standards    | ETL, cETL, Damp Location Listed  |
| Input        | 120-277 VAC, 50/60Hz             |
| Dimming      | ELV                              |
| Color Temp   | 2700K/3000K/3500K/4000K          |
| CRI          | 90                               |
| Construction | Steel body with crystal diffuser |

REPLACEMENT PARTS

RPL-GLA-41719 - Glass

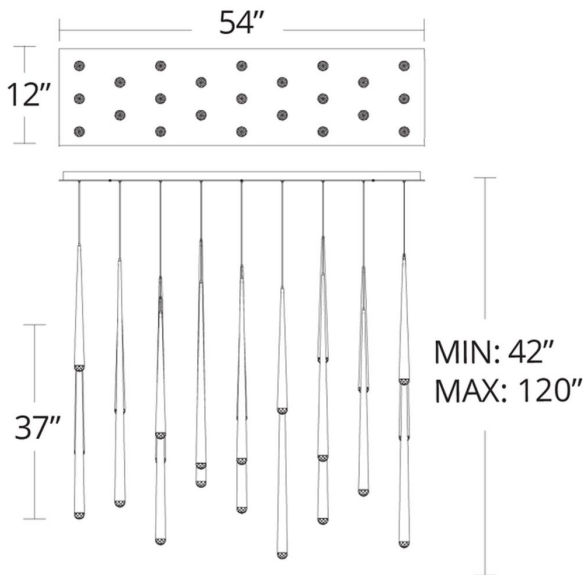

PD-41723L

| Model & Size              | Color Temp & CRI | Watt | Lumens | Finish             |
|---------------------------|------------------|------|--------|--------------------|
| PD-41723L 54" - 23 Lights | 2700K/3000K/     | 161W | 8631   | AB Aged Brass      |
|                           | 90               | 161W | 8631   | BK Black           |
|                           | 2700K/3000K/     | 161W | 8631   | PN Polished Nickel |
|                           | 90               |      |        |                    |
|                           | 2700K/3000K/     |      |        |                    |
|                           | 90               |      |        |                    |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

Example: **PD-41723L-PN**  
For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

\* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

