


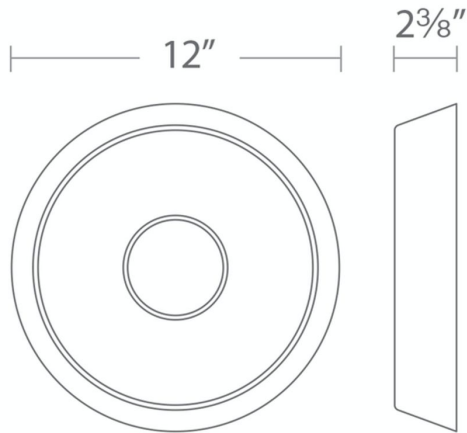

FM-74712

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Sol

FM-74712

PRODUCT DESCRIPTION

Whether you're mounting it on the wall or ceiling, this sun is plenty safe to stare at, and its light emission is just as reliable. An interchangeable polished or brushed nickel disc at the center of the shade contrasts with the smooth, over-scaled, centrifugal glass for a more modern take on the ultimate light source.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Opal glass with interchangeable discs in polished and brushed nickel
- No exposed hardware or screws for seamless appearance

SPECIFICATIONS

Rated Life	70000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K
CRI	90
Construction	Die-Cast Aluminum and Opal glass

REPLACEMENT PARTS

RPL-GLA-74712 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-74712 12"	3000K	PN/BN Polished Nickel/Brushed Nickel	19W	1865	975


Example: **FM-74712-PN/BN**

•For 277V special order, add an "F" before the finish: FM-74712F-PN/BN

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right



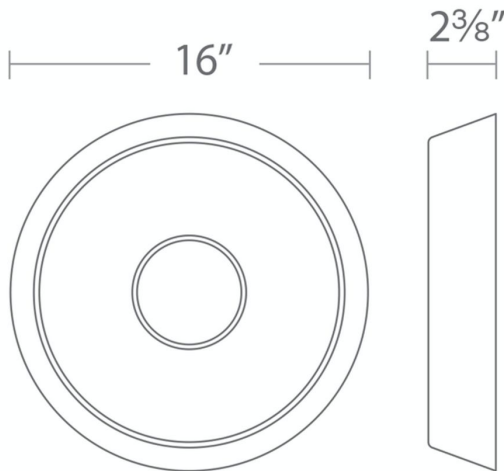

FM-74716

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Sol

FM-74716

PRODUCT DESCRIPTION

Whether you're mounting it on the wall or ceiling, this sun is plenty safe to stare at, and its light emission is just as reliable. An interchangeable polished or brushed nickel disc at the center of the shade contrasts with the smooth, over-scaled, centrifugal glass for a more modern take on the ultimate light source.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Opal glass with interchangeable discs in polished and brushed nickel
- No exposed hardware or screws for seamless appearance

SPECIFICATIONS

Rated Life	70000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3000K
CRI	90
Construction	Die-Cast Aluminum and Opal glass

REPLACEMENT PARTS

RPL-GLA-74716 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-74716 16"	3000K	PN/BN Polished Nickel/Brushed Nickel	29.5W	2825	1350

Example: **FM-74716-PN/BN**

•For 277V special order, add an "F" before the finish: FM-74716F-PN/BN

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

