

WS-3618

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Loft

WS-3618

PRODUCT DESCRIPTION

Mouth-blown etched opal glass and clean contours define this collection of vanities and wall sconces, perfect for bathrooms, hallways and anywhere you need a strikingly simple dose of glare-free, energy-efficient light.

FEATURES

- 277V option available for special order.
- ACLED driverless technology
- Mouth-blown etched opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	80000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Aluminum with mouth blown etched opal glass

REPLACEMENT PARTS

RPL-GLA-3618 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-3618 18"	2700K	BN Brushed Nickel	28W	2000	1650
	3500K	BN Brushed Nickel	28W	2000	1650
	3000K	BN Brushed Nickel	28W	2000	1650

Example: **WS-3618-BN**

•For 277V special order, add an "F" before the finish: WS-3618F-BN

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right





Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Loft

WS-3624

PRODUCT DESCRIPTION

Mouth-blown etched opal glass and clean contours define this collection of vanities and wall sconces, perfect for bathrooms, hallways and anywhere you need a strikingly simple dose of glare-free, energy-efficient light.

FEATURES


- 277V option available for special order.
- ACLED driverless technology
- Mouth-blown etched opal glass diffuser
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

SPECIFICATIONS

Rated Life	80000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 3500K, 2700K
CRI	90
Construction	Aluminum with mouth blown etched opal glass

REPLACEMENT PARTS

RPL-GLA-3624 - Glass

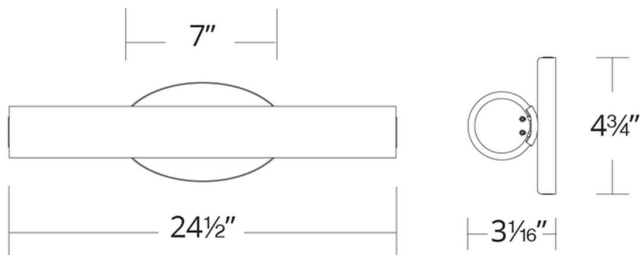

WS-3624

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-3624 24"	2700K	BN Brushed Nickel	30W	2800	1956
	3500K	BN Brushed Nickel	30W	2800	1956
	3000K	BN Brushed Nickel	30W	2800	1956

Example: **WS-3624-BN**

•For 277V special order, add an "F" before the finish: WS-3624F-BN

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

