



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Zenith

FM-5415

PRODUCT DESCRIPTION

This diffused, simple, low-profile 15-inch flush mount fixture that is unassuming yet packed with the latest in LED technology. Specify your color temperature for a project and have the flexibility to select your own in the field with the on-board CCT selection switch. For longer commercial corridors, utilize the unique construction of this flush mount to allow you to seamlessly add emergency battery backup units, without breaking the size symmetry between fixtures.

FEATURES


- Driver concealed within the fixture
- Multiple LED array for uniform illumination
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K/5000K
- Option to pre-select color temperature or adjust in the field
- Emergency battery backup option available (special order).

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on ceiling or wall in all orientations
Color Temp	3500K, 5000K, 4000K, 3000K, 2700K
CRI	90
Construction	Aluminum body with acrylic diffuser

REPLACEMENT PARTS

RPL-SHA-5415 - Shade

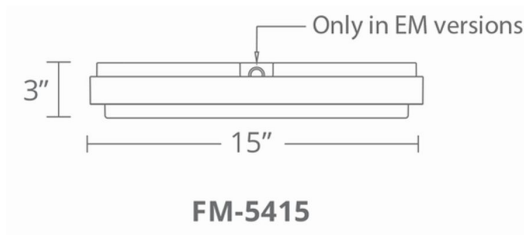

FM-5415

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-5415 15"	2700K	TT Titanium	26W	2250	1663
	3000K	TT Titanium	26W	2306	1698
	3500K	TT Titanium	25.9W	2382	1739
	4000K	TT Titanium	25.8W	2440	1778
	5000K	TT Titanium	25.9W	2530	1818

Example: **FM-5415-50-TT**

•For emergency battery backup option, add -EM after the finish FM-5415-35-TT-EM

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

