


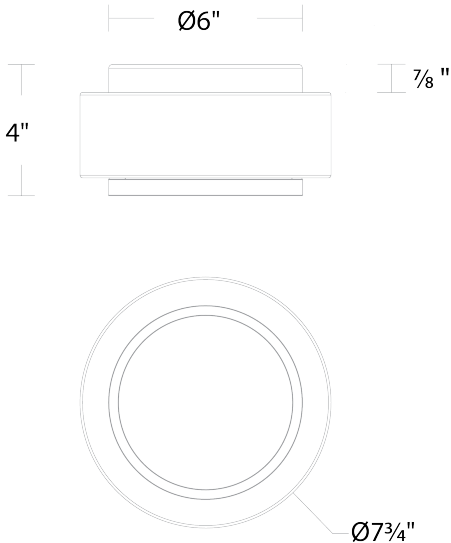

FM-12508

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Preston

FM-12508

PRODUCT DESCRIPTION

Elevate your ceiling with the elegant Preston flush mount light defined by its dramatic opal shade encased in a polished circular frame. The etched shade softly diffuses the light from integrated, color temperature selectable LEDs, creating a warm and inviting glow.

FEATURES

- ACLED driverless technology
- Mouth blown opal glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Color Temp	3500K, 4000K, 3000K, 2700K
CRI	90
Construction	Aluminum frame with mouth blown glass diffuser

REPLACEMENT PARTS

RPL-GLA-12508 - Opal Glass


Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-12508 8"	2700K	AB Aged Brass	9.7W	922	549
	2700K	BK Black	9.7W	922	549
	3000K	AB Aged Brass	9.7W	964	575
	3000K	BK Black	9.7W	964	575
	3500K	AB Aged Brass	9.7W	1001	596
	3500K	BK Black	9.7W	1001	596
	4000K	AB Aged Brass	9.7W	999	595
	4000K	BK Black	9.7W	999	595

Example: **FM-12508-40-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right



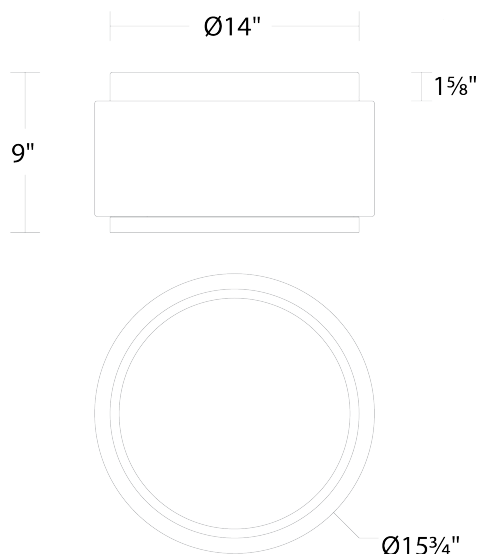

FM-12516


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Preston

FM-12516

PRODUCT DESCRIPTION

Elevate your ceiling with the elegant Preston flush mount light defined by its dramatic opal shade encased in a polished circular frame. The etched shade softly diffuses the light from integrated, color temperature selectable LEDs, creating a warm and inviting glow.

FEATURES

- ACLED driverless technology
- Mouth blown opal glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
Input	120 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Aluminum frame with mouth blown glass diffuser

REPLACEMENT PARTS

RPL-GLA-12516 - Opal Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-12516 16"	2700K	AB Aged Brass	27.6W	2884	1644
	2700K	BK Black	27.6W	2884	1644
	3000K	AB Aged Brass	27.6W	2924	1666
	3000K	BK Black	27.6W	2924	1666
	3500K	AB Aged Brass	27.6W	3047	1731
	3500K	BK Black	27.6W	3047	1731
	4000K	AB Aged Brass	27.6W	3045	1728
	4000K	BK Black	27.6W	3045	1728

Example: **FM-12516-40-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

