




Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Swale

WS-1520

**PRODUCT DESCRIPTION**

Luxe Industrial. The Swale wall sconce has a distinctive silhouette from a bold trapezoidal channel featuring modern, clean lines. A mitered glass rod complements its sleek silhouette, diffusing color temperature selectable LED light into a radiant, even glow. Mount the light horizontally or vertically as desired.

**FEATURES**


- Driver concealed within the canopy
- White ceramic silk-screened mitered glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
<b>Input</b>	120-277 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-10%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	4000K, 3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum frame with mitered tempered glass

**REPLACEMENT PARTS**

RPL-GLA-1520 - Mitered Glass

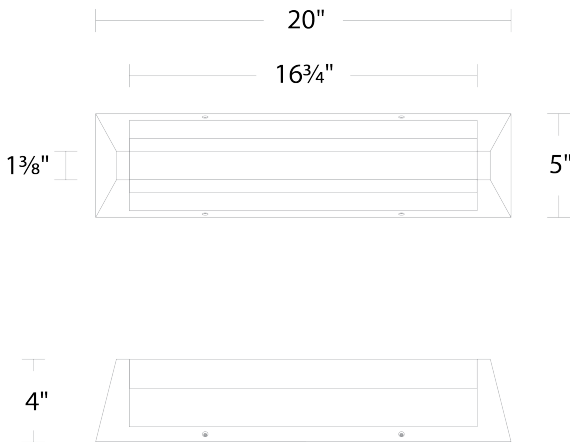

WS-1520

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-1520 20"	2700K	AB Aged Brass	20.2W	2000	1459
	2700K	BN Brushed Nickel	20.2W	2000	1459
	3000K	AB Aged Brass	20.2W	2000	1542
	3000K	BN Brushed Nickel	20.2W	2000	1542
	3500K	AB Aged Brass	20.2W	2000	1601
	3500K	BN Brushed Nickel	20.2W	2000	1601
	4000K	AB Aged Brass	20.2W	2000	1589
	4000K	BN Brushed Nickel	35.2W	2000	1589

Example: **WS-1520-40-BN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

\* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right






Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



# Swale

WS-1527

**PRODUCT DESCRIPTION**

Luxe Industrial. The Swale wall sconce has a distinctive silhouette from a bold trapezoidal channel featuring modern, clean lines. A mitered glass rod complements its sleek silhouette, diffusing color temperature selectable LED light into a radiant, even glow. Mount the light horizontally or vertically as desired.

**FEATURES**


- Driver concealed within the canopy
- White ceramic silk-screened mitered glass
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
<b>Input</b>	120-277 VAC, 50/60Hz
<b>Dimming</b>	ELV: 100-10%, TRIAC: 100-10%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	4000K, 3500K, 3000K, 2700K
<b>CRI</b>	90
<b>Construction</b>	Aluminum frame with mitered tempered glass

**REPLACEMENT PARTS**

RPL-GLA-1527 - Mitered Glass

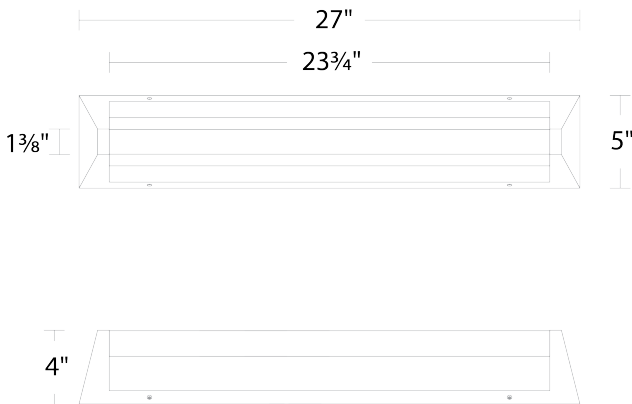

WS-1527

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-1527 27"	2700K	AB Aged Brass	35.2W	3442	2368
	2700K	BN Brushed Nickel	35.2W	3442	2368
	3000K	AB Aged Brass	35.2W	3745	2562
	3000K	BN Brushed Nickel	35.2W	3745	2562
	3500K	AB Aged Brass	35.2W	3932	2682
	3500K	BN Brushed Nickel	35.2W	3932	2682
	4000K	AB Aged Brass	35.2W	3929	2666
	4000K	BN Brushed Nickel	35.2W	3929	2666

Example: **WS-1527-40-BN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

\* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

