


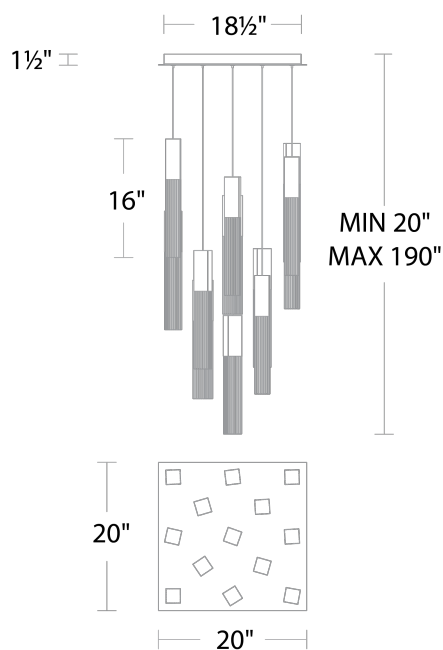

PD-30813S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cinema

PD-30813S

PRODUCT DESCRIPTION

In a luxe finish, the Cinema Square multi-light pendant makes a modern statement that's right in line with the latest trends. Painstakingly V-cut seeded crystal adds understated glamour when it fills with light sourced from high-performance LEDS offering color temperature adjustability. You can select 13, 25 or 41 lights installed on a square canopy.

FEATURES

- Driver concealed within the canopy
- V-cut K5 seedy crystal
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs., 175 lbs. and 300 lbs. respectively, or supported indepe

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal

REPLACEMENT PARTS

RPL-GLA-30816 - Replacement Crystal


Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-30813S 20" - 13 Lights	2700K/3000K/ 90	75W 75W	3771 3771	AB Aged Brass BK Black
	2700K/3000K/ 90			

Example: **PD-30813S-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right



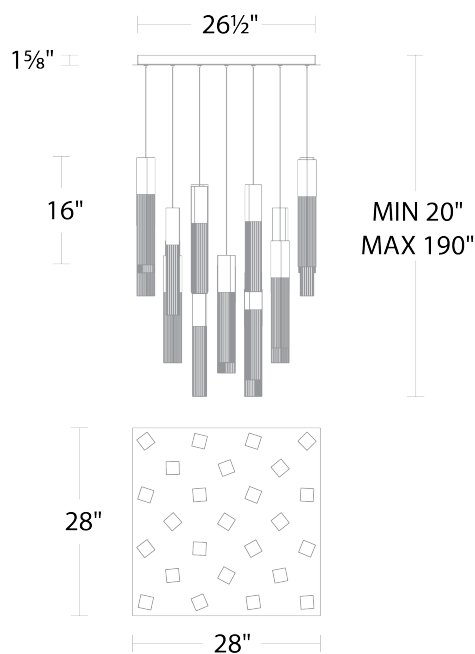

PD-30825S


Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cinema

PD-30825S

PRODUCT DESCRIPTION

In a luxe finish, the Cinema Square multi-light pendant makes a modern statement that's right in line with the latest trends. Painstakingly V-cut seeded crystal adds understated glamour when it fills with light sourced from high-performance LEDs offering color temperature adjustability. You can select 13, 25 or 41 lights installed on a square canopy.

FEATURES

- Driver concealed within the canopy
- V-cut K5 seedy crystal
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs., 175 lbs. and 300 lbs. respectively, or supported indepe

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-5%,TRIAC: 100-5%
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal

REPLACEMENT PARTS

RPL-GLA-30816 - Replacement Crystal



Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-30825S 28" - 25 Lights	2700K/3000K/	156W	7253	AB Aged Brass
	90	156W	7253	BK Black
	2700K/3000K/			
	90			

Example: **PD-308255-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right



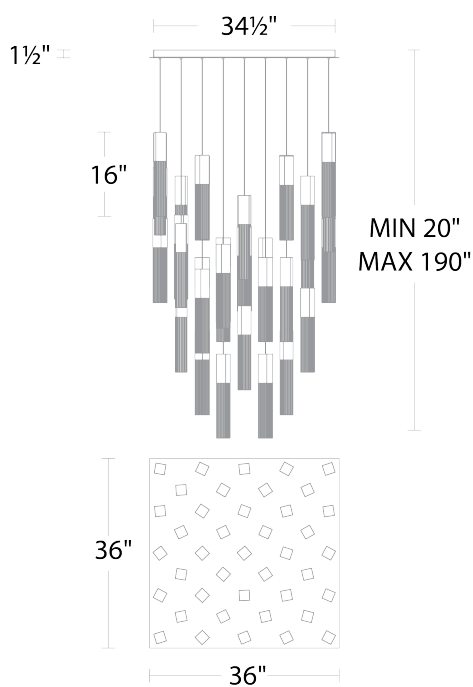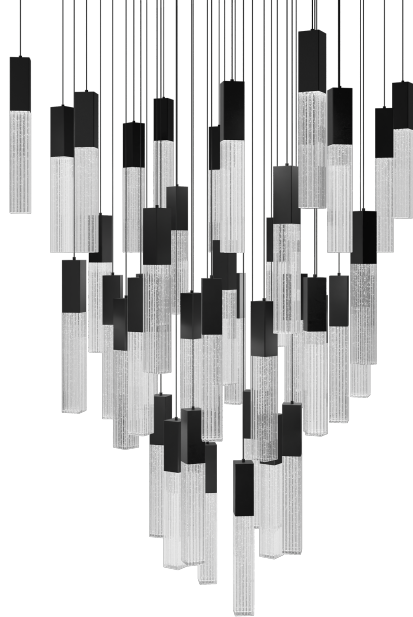

PD-30841S

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Cinema

PD-30841S

PRODUCT DESCRIPTION

In a luxe finish, the Cinema Square multi-light pendant makes a modern statement that's right in line with the latest trends. Painstakingly V-cut seeded crystal adds understated glamour when it fills with light sourced from high-performance LEDs offering color temperature adjustability. You can select 13, 25 or 41 lights installed on a square canopy.

FEATURES

- Driver concealed within the canopy
- V-cut K5 seedy crystal
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, and 41 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs., 175 lbs. and 300 lbs. respectively, or supported indepe

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-5%
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Aluminum frame with seedy K5 crystal

REPLACEMENT PARTS

RPL-GLA-30816 - Replacement Crystal

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-30841S 36" - 41 Lights	2700K/3000K/	280W	11894	AB Aged Brass
	90	280W	11894	BK Black
	2700K/3000K/			
	90			

Example: **PD-30841S-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

