


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.2761A P:32.727W PF:0.9880 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:2262.13x1 lm


NAME: FR-W2605-54L	TYPE: Ceiling Fan Light Kits	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: MODERN FORMS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 69.12 lm/W
MODEL		I _{max} (cd)	688.3	S/MH (C0/180)	1.31	
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.34	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	2262.1	η UP, DN (C0-180)	2.0, 46.5	
NOMINAL FLUX (lm)	2262.13	CIE CLASS	DIRECT	η UP, DN (C180-360)	2.2, 49.3	
LAMPS INSIDE	1	η up (%)	4.2	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	120	η down (%)	95.8	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

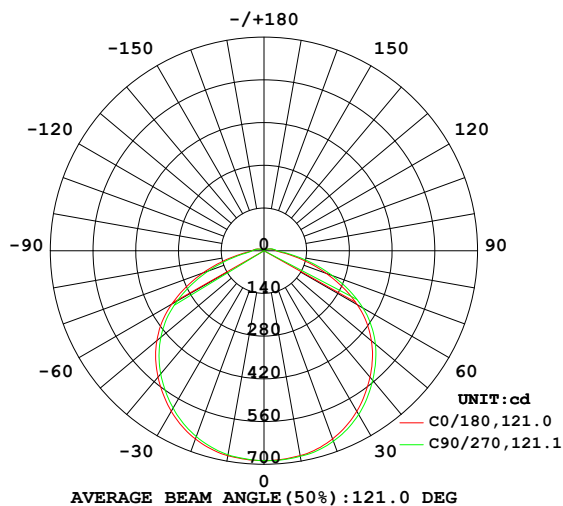

PLANAR ISOLUX DIAGRAM (UNIT: lx)

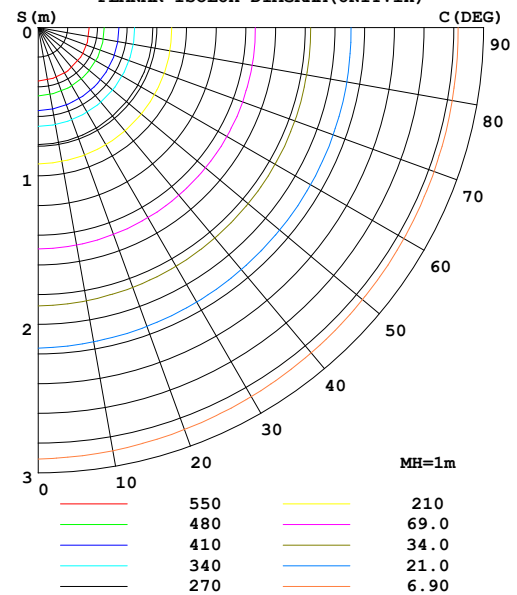

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2025-12-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.472m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum
10	682.1	680.6	679.0	679.2	681.8	683.5	684.1	683.9	0- 10	65.35	65.35	2.89
20	656.5	651.8	648.2	650.2	656.5	662.0	664.3	661.9	10- 20	189.9	255.2	11.3
30	607.6	600.3	595.6	597.7	608.0	616.7	620.1	616.4	20- 30	292.7	548.0	24.2
40	540.5	532.3	526.6	528.8	540.7	550.7	554.2	550.2	30- 40	360.4	908.4	40.2
50	458.5	448.0	441.3	445.4	459.5	471.8	476.7	470.6	40- 50	387.3	1296	57.3
60	348.4	335.6	327.9	333.6	352.6	368.0	374.1	365.7	50- 60	365.0	1661	73.4
70	213.0	200.0	193.1	198.7	217.6	232.8	238.4	230.3	60- 70	281.0	1942	85.8
80	90.45	82.63	79.21	82.08	94.40	104.7	109.2	103.3	70- 80	159.4	2101	92.9
90	40.93	40.26	39.38	39.59	40.54	41.94	42.94	41.43	80- 90	65.11	2166	95.8
100	29.17	28.38	27.54	27.80	28.99	29.96	30.37	29.40	90-100	38.17	2204	97.4
110	16.96	16.30	15.70	15.74	17.13	18.09	18.25	17.56	100-110	24.32	2229	98.5
120	8.431	8.276	8.022	7.865	8.994	9.319	9.439	9.155	110-120	12.29	2241	99.1
130	6.551	6.769	6.845	6.480	6.894	7.145	6.987	6.799	120-130	6.583	2248	99.4
140	6.471	6.781	6.978	6.484	6.833	7.231	6.929	6.592	130-140	5.227	2253	99.6
150	7.989	8.198	8.336	7.843	7.920	8.204	8.113	8.036	140-150	4.593	2257	99.8
160	5.828	5.717	5.503	4.941	6.197	6.532	6.724	6.470	150-160	3.431	2261	99.9
170	1.434	1.396	1.290	1.504	1.923	2.424	2.618	2.462	160-170	1.155	2262	100
180	0.6594	0.6620	0.6681	0.6676	0.6607	0.6632	0.6684	0.6722	170-180	0.1089	2262	100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1101.4 lm

%lum = 48.7%

%lamp = 48.7%

Conical surface Flux(120deg): 1660.8 lm


%lum = 73.4%

%lamp = 73.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.472m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

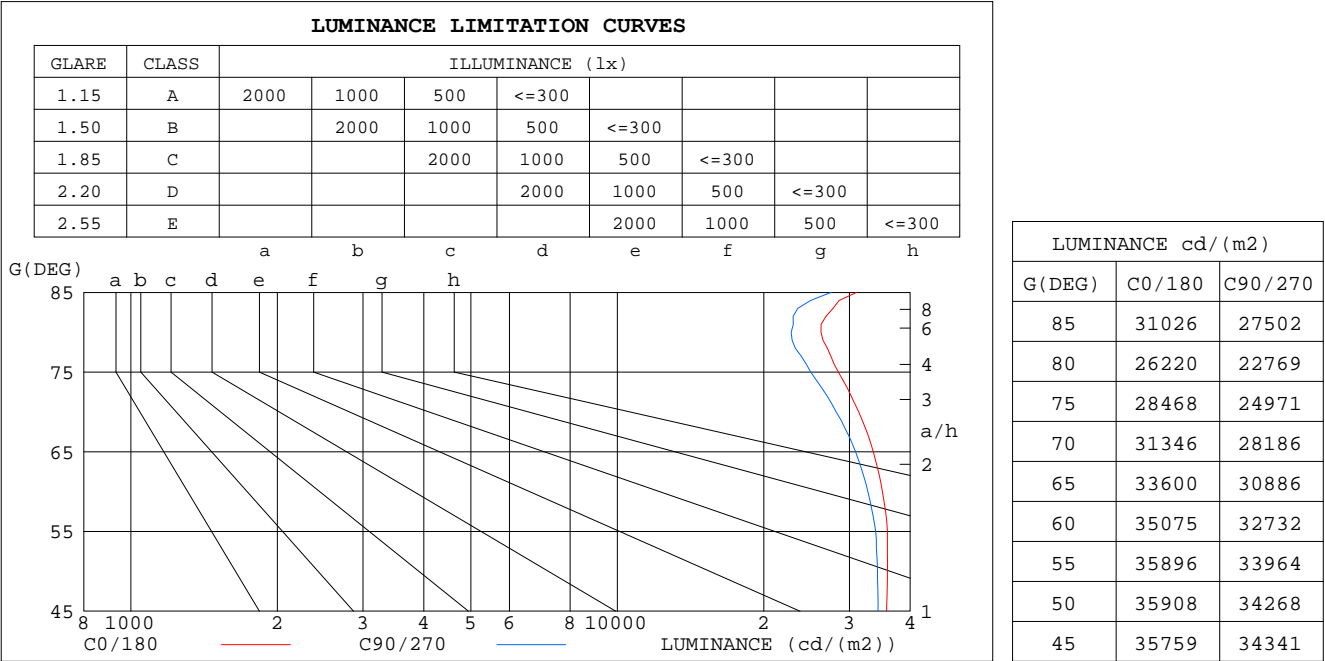


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2025-12-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.472m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.96
1.0	1.02	.98	.94	.99	.95	.92	.94	.91	.88	.90	.87	.85	.85	.83	.81	.79
2.0	.89	.81	.76	.86	.80	.74	.82	.77	.72	.78	.74	.70	.74	.71	.67	.65
3.0	.77	.69	.62	.76	.68	.61	.72	.65	.60	.69	.63	.58	.65	.61	.57	.54
4.0	.68	.59	.52	.67	.58	.52	.64	.56	.51	.61	.55	.50	.58	.53	.48	.46
5.0	.61	.52	.45	.59	.51	.44	.57	.49	.44	.54	.48	.43	.52	.46	.42	.40
6.0	.55	.46	.39	.53	.45	.39	.51	.44	.38	.49	.42	.37	.47	.41	.37	.34
7.0	.49	.40	.34	.48	.40	.34	.46	.39	.33	.45	.38	.33	.43	.37	.32	.30
8.0	.45	.36	.30	.44	.36	.30	.42	.35	.30	.41	.34	.29	.39	.33	.29	.27
9.0	.41	.33	.27	.40	.32	.27	.39	.32	.27	.38	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.25	.37	.30	.24	.36	.29	.24	.35	.28	.24	.34	.28	.24	.22

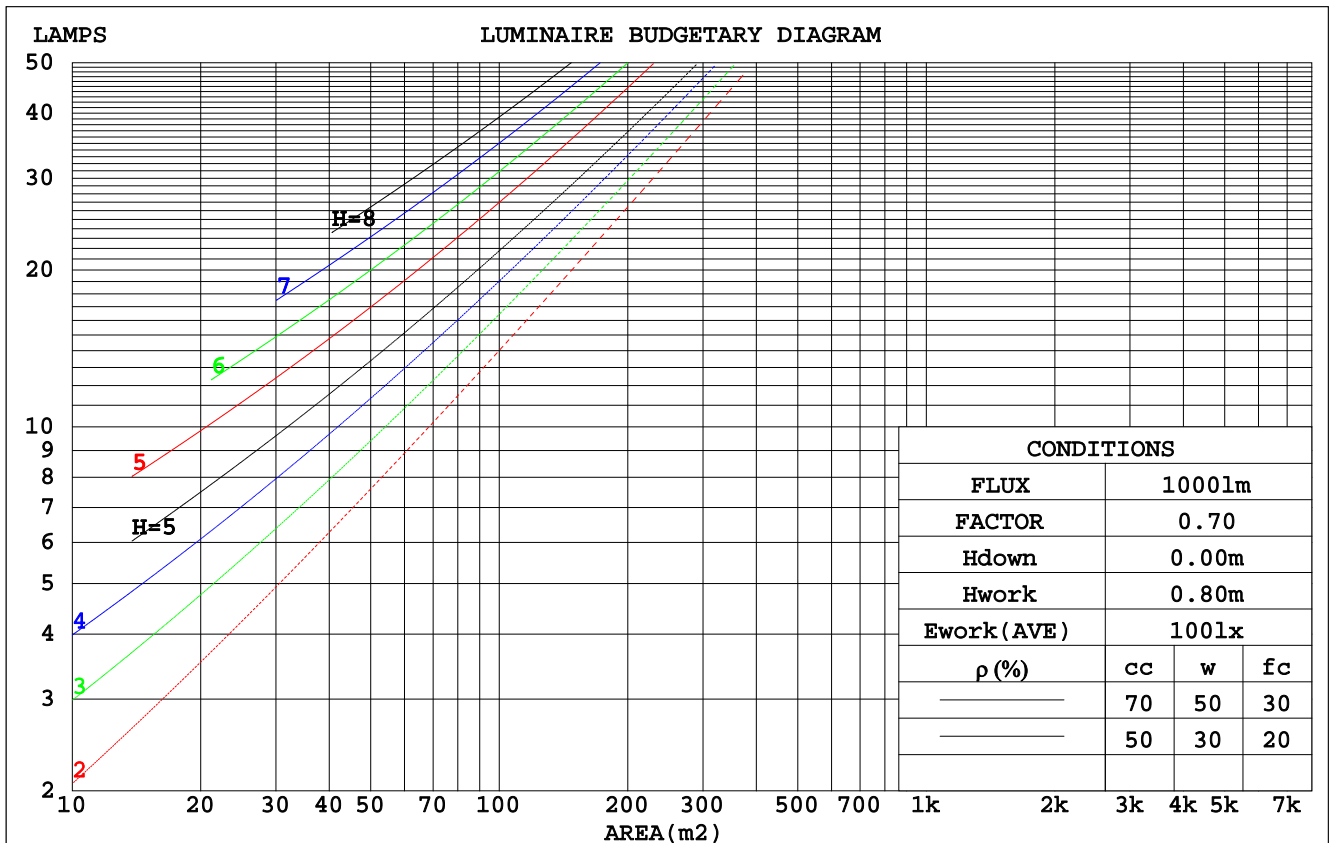

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2025-12-25

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.472m [K=1.0000]
Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.324	.184	.058	.315	.180	.057	.300	.172	.055	.285	.164	.053	.272	.158	.051	
2.0	.300	.164	.050	.293	.161	.050	.279	.155	.048	.266	.149	.047	.254	.143	.045	
3.0	.276	.147	.044	.269	.144	.043	.257	.139	.042	.245	.134	.041	.234	.130	.040	
4.0	.253	.132	.039	.248	.130	.038	.236	.125	.037	.226	.121	.037	.216	.118	.036	
5.0	.234	.119	.034	.228	.117	.034	.218	.114	.033	.209	.110	.033	.200	.107	.032	
6.0	.216	.108	.031	.212	.107	.031	.202	.104	.030	.194	.101	.030	.186	.098	.029	
7.0	.201	.099	.028	.197	.098	.028	.189	.095	.027	.181	.093	.027	.174	.090	.027	
8.0	.187	.092	.026	.184	.090	.026	.176	.088	.025	.169	.086	.025	.163	.084	.024	
9.0	.175	.085	.024	.172	.084	.024	.165	.082	.023	.159	.080	.023	.153	.078	.022	
10.0	.165	.079	.022	.162	.078	.022	.155	.076	.021	.150	.074	.021	.144	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.223	.223	.223	.190	.190	.190	.130	.130	.130	.075	.075	.075	.024	.024	.024	
1.0	.214	.189	.166	.183	.162	.143	.125	.111	.099	.072	.064	.057	.023	.021	.019	
2.0	.206	.165	.130	.177	.142	.112	.121	.098	.078	.070	.057	.046	.022	.018	.015	
3.0	.199	.147	.106	.170	.127	.092	.117	.088	.065	.067	.052	.038	.022	.017	.012	
4.0	.191	.134	.091	.164	.116	.079	.113	.081	.056	.065	.047	.033	.021	.015	.011	
5.0	.184	.124	.080	.158	.107	.069	.109	.075	.049	.063	.044	.029	.020	.014	.010	
6.0	.176	.116	.072	.152	.100	.063	.105	.070	.044	.061	.041	.026	.020	.013	.009	
7.0	.170	.109	.066	.146	.094	.058	.101	.066	.041	.059	.039	.024	.019	.013	.008	
8.0	.163	.103	.062	.140	.089	.054	.097	.063	.038	.057	.037	.023	.018	.012	.008	
9.0	.157	.098	.059	.135	.085	.051	.094	.060	.036	.055	.035	.022	.018	.012	.007	
10.0	.151	.094	.056	.130	.082	.049	.090	.057	.035	.053	.034	.021	.017	.011	.007	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.472m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.6	25.4	26.8	27.1	24.8	26.3	25.2	26.6	26.9
3H	26.6	28.0	26.9	28.3	28.6	26.2	27.6	26.6	27.9	28.2
4H	27.1	28.5	27.5	28.8	29.1	26.7	28.0	27.1	28.4	28.7
6H	27.6	28.8	28.0	29.1	29.5	27.1	28.3	27.5	28.7	29.0
8H	27.7	28.9	28.1	29.3	29.7	27.2	28.4	27.6	28.8	29.1
12H	27.9	29.0	28.3	29.4	29.8	27.3	28.5	27.8	28.9	29.3
4H 2H	25.6	26.9	26.0	27.3	27.6	25.4	26.7	25.8	27.1	27.4
3H	27.3	28.4	27.7	28.8	29.2	27.0	28.1	27.4	28.5	28.9
4H	28.0	29.0	28.4	29.4	29.8	27.6	28.7	28.1	29.1	29.5
6H	28.5	29.4	29.0	29.9	30.3	28.1	29.0	28.5	29.4	29.9
8H	28.7	29.6	29.2	30.0	30.5	28.3	29.1	28.7	29.6	30.1
12H	28.9	29.7	29.4	30.2	30.7	28.5	29.3	29.0	29.7	30.2
8H 4H	28.2	29.0	28.6	29.5	30.0	27.8	28.7	28.3	29.2	29.6
6H	28.8	29.6	29.4	30.0	30.6	28.5	29.2	29.0	29.7	30.2
8H	29.2	29.8	29.7	30.3	30.9	28.8	29.4	29.3	29.9	30.4
12H	29.5	30.1	30.1	30.6	31.2	29.1	29.6	29.6	30.1	30.7
12H 4H	28.2	29.0	28.7	29.4	29.9	27.9	28.6	28.3	29.1	29.6
6H	28.9	29.5	29.4	30.0	30.6	28.5	29.2	29.1	29.7	30.2
8H	29.3	29.8	29.8	30.3	30.9	28.9	29.4	29.4	29.9	30.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 2262 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.8$)
Area: 0.02 m²

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Oliver
Test Date:2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity:65.0%
Test Distance:2.472m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	42	35	52	42	35	29
0.80	65	53	45	63	52	45	61	51	44	37
1.00	73	61	54	72	61	54	69	62	53	45
1.25	80	69	62	79	68	61	76	67	60	52
1.50	85	75	67	83	74	67	80	72	66	57
2.00	92	83	76	90	82	75	86	79	74	65
2.50	96	88	82	94	86	81	90	83	78	69
3.00	100	92	87	97	91	85	93	87	83	73
4.00	104	98	93	101	96	91	97	92	88	78
5.00	107	101	97	104	99	95	99	95	91	81
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.472m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

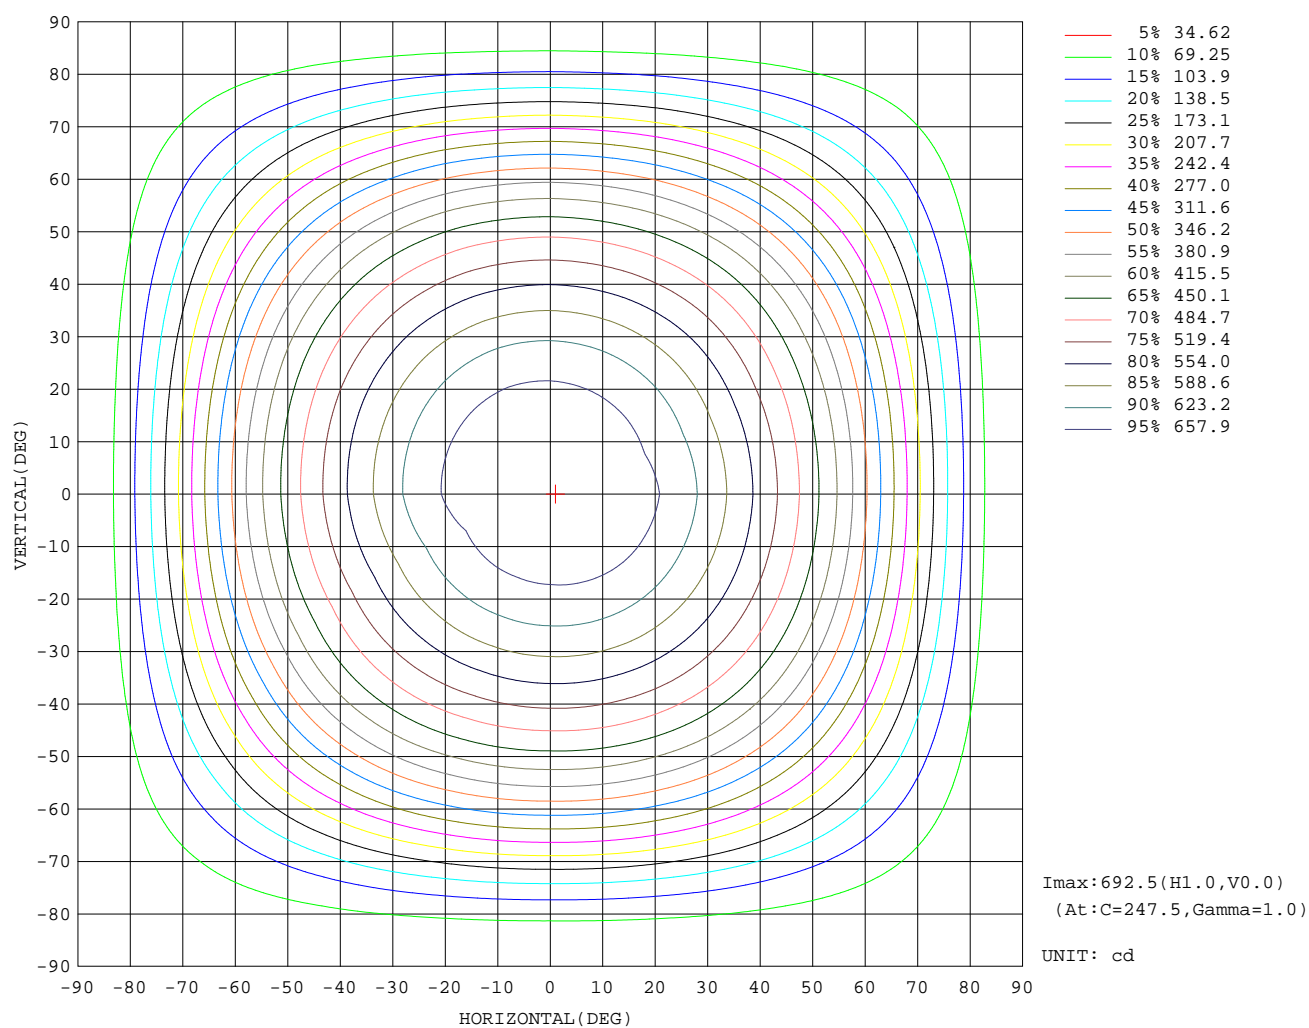

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.472m [K=1.0000]
Remarks:


AAI Figure

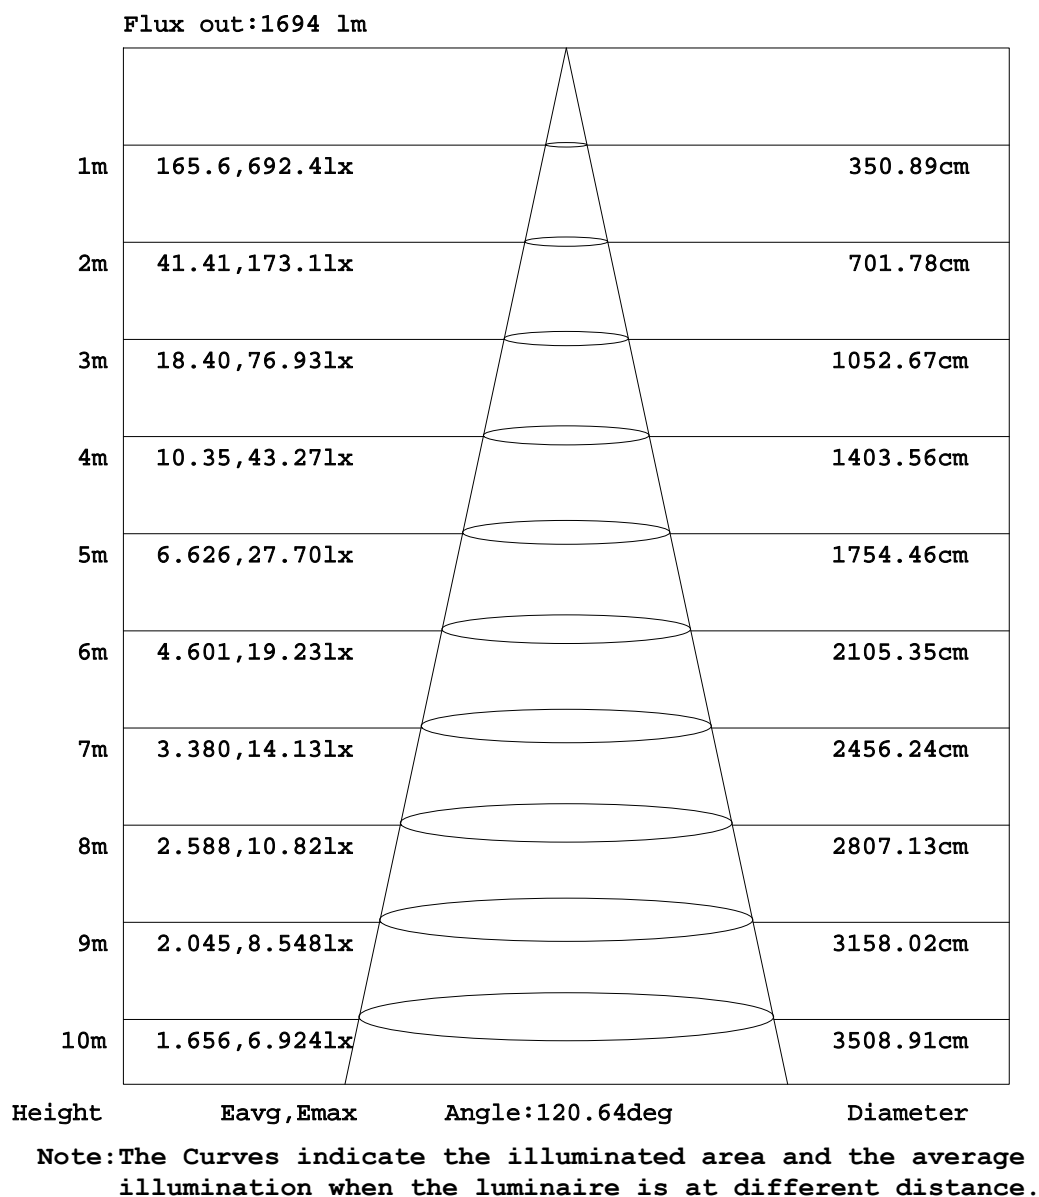

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.472m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

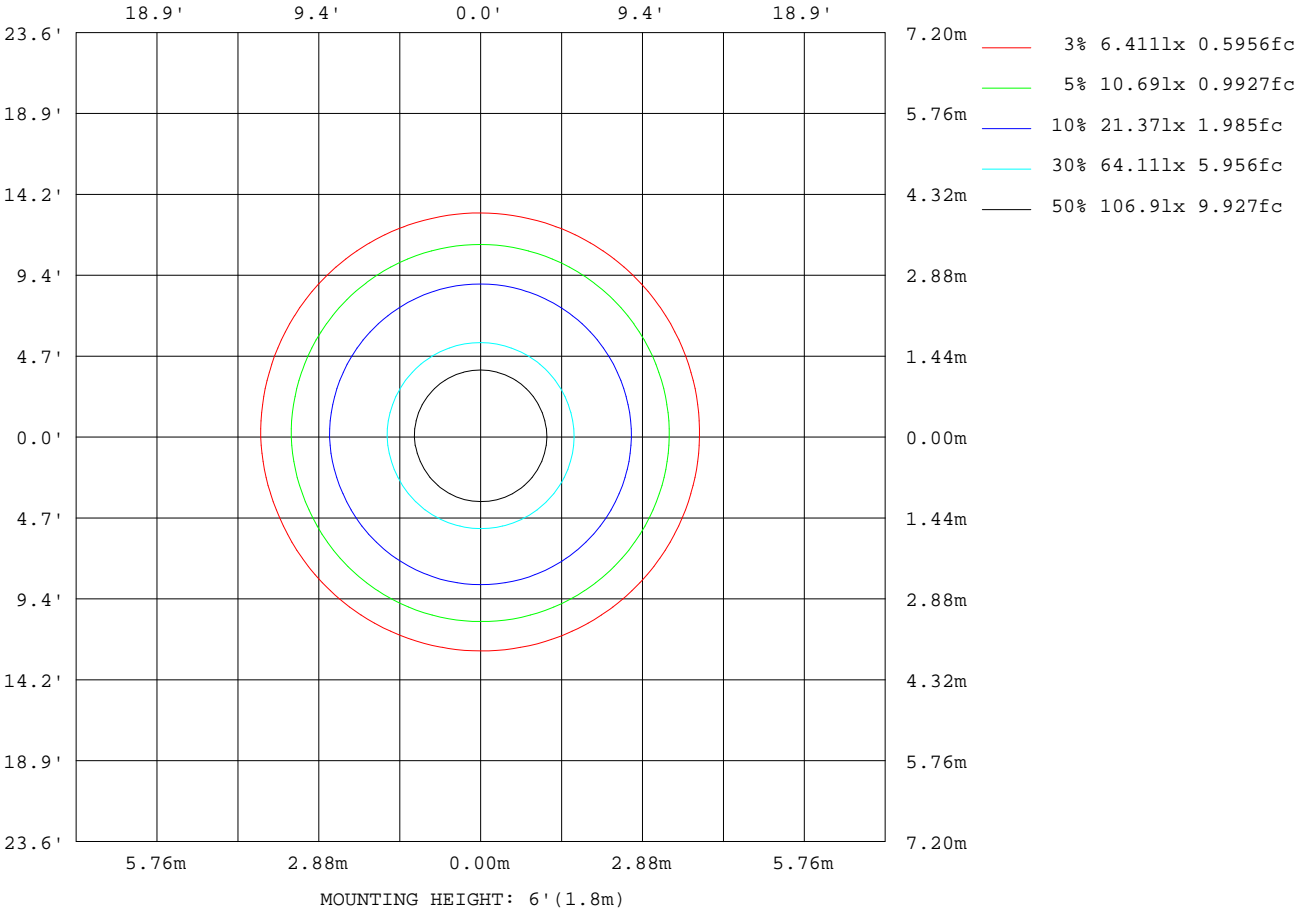

C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Temperature: 25.3DEG	Humidity: 65.0%
Operators: Oliver	Test Distance: 2.472m [K=1.0000]
Test Date: 2025-12-25	Remarks:

LED Avg.L Report

Test:U:119.97V I:0.2761A P:32.727W PF:0.9880 Freq:60.00Hz UTHDi:0.00% ITHDi:0.00% Lamp Flux:2262.13x1 Lm

NAME: FR-W2605-54L	TYPE: Ceiling Fan Light Kits	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: WAC Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	33642
L_0~180 (75) av	28758
L_0~180 (85) av	31281
L_90~270 (65) av	33729
L_90~270 (75) av	28979
L_90~270 (85) av	32451
L_45 (65) av	33683
L_45 (75) av	28857
L_45 (85) av	31775

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Oliver
 Test Date:2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity:65.0%
 Test Distance:2.472m [K=1.0000]
 Remarks:

Planar Illuminance Curve

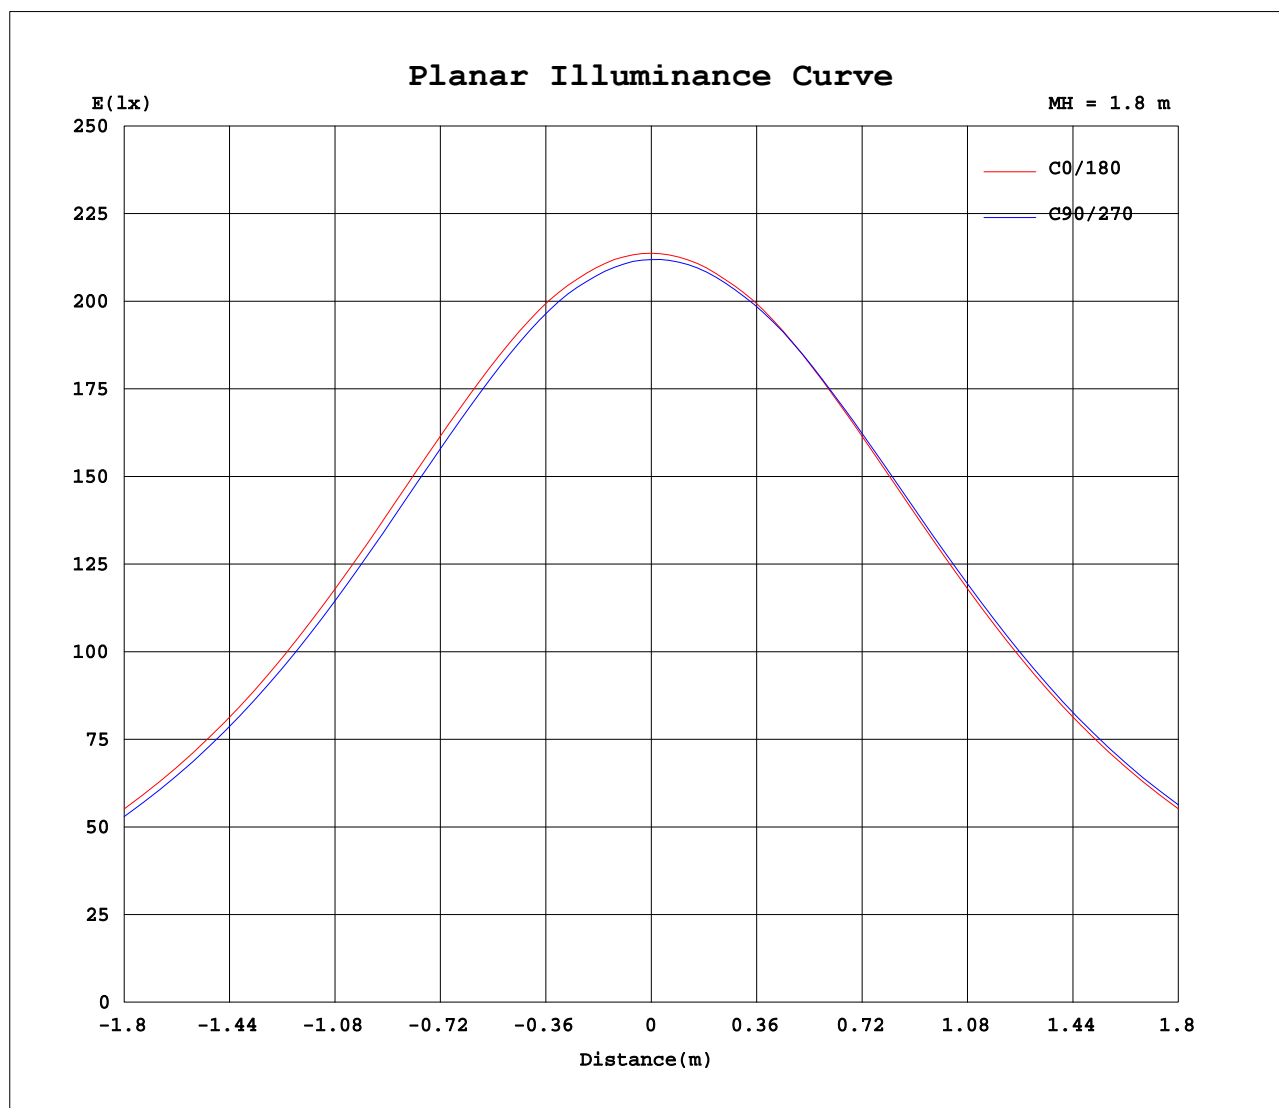

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Oliver
Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
Humidity: 65.0%
Test Distance: 2.472m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	688	688	688	688	688	688	688	688	688	688	688	688	688	688	688	688			
5	686	686	685	685	685	685	685	685	686	686	688	688	688	688	687	687			
10	682	681	681	680	679	679	679	680	682	683	684	684	684	684	684	683			
15	672	671	669	667	666	666	668	669	673	675	676	678	678	678	676	674			
20	656	654	652	650	648	649	650	652	656	659	662	664	664	663	662	659			
25	635	632	629	626	625	625	627	630	635	639	642	645	645	644	642	639			
30	608	604	600	597	596	595	598	601	608	613	617	619	620	619	616	613			
35	575	571	568	564	563	562	565	568	576	581	586	589	589	588	585	581			
40	540	537	532	529	527	526	529	533	541	546	551	554	554	553	550	546			
45	502	498	493	489	486	487	490	494	502	508	513	516	517	515	513	508			
50	459	453	448	444	441	442	445	450	460	466	472	476	477	474	471	466			
55	409	403	397	393	390	391	395	401	410	418	424	429	429	426	422	417			
60	348	342	336	331	328	329	334	340	353	361	368	373	374	371	366	359			
65	282	275	269	264	262	263	267	274	287	294	303	308	309	306	300	293			
70	213	206	200	196	193	195	199	205	218	225	233	237	238	236	230	224			
75	146	140	135	131	129	131	134	140	151	158	165	169	171	168	163	157			
80	90.4	86.0	82.6	80.4	79.2	79.8	82.1	86.1	94.4	99.7	105	108	109	107	103	98.4			
85	53.7	52.0	50.0	48.7	48.0	48.3	49.4	51.2	55.3	58.5	61.5	64.2	65.1	63.9	60.7	57.7			
90	40.9	40.8	40.3	39.8	39.4	39.3	39.6	39.9	40.5	41.1	41.9	42.8	42.9	42.3	41.4	41.1			
95	35.1	34.9	34.3	33.8	33.4	33.4	33.7	34.1	35.0	35.6	36.3	36.9	36.9	36.4	35.9	35.5			
100	29.2	28.9	28.4	28.0	27.5	27.5	27.8	28.3	29.0	29.5	30.0	30.4	30.4	29.8	29.4	29.3			
105	23.0	22.4	21.9	21.4	21.2	21.1	21.5	22.0	23.0	23.7	24.2	24.6	24.6	24.3	23.7	23.4			
110	17.0	16.5	16.3	15.9	15.7	15.5	15.7	16.2	17.1	17.6	18.1	18.3	18.3	18.0	17.6	17.3			
115	11.7	11.5	11.5	11.2	11.0	10.8	11.0	11.5	12.3	12.7	12.9	13.4	13.3	13.1	12.9	12.4			
120	8.43	8.25	8.28	8.22	8.02	7.75	7.87	8.21	8.99	9.29	9.32	9.44	9.44	9.30	9.16	8.81			
125	6.86	6.82	7.07	7.20	7.08	6.75	6.69	6.91	7.32	7.37	7.41	7.44	7.36	7.38	7.20	7.04			
130	6.55	6.50	6.77	6.95	6.85	6.70	6.48	6.60	6.89	7.03	7.15	7.04	6.99	6.97	6.80	6.65			
135	6.40	6.42	6.71	6.93	6.90	6.73	6.39	6.39	6.68	6.84	7.02	6.97	6.85	6.81	6.56	6.48			
140	6.47	6.54	6.78	7.00	6.98	6.82	6.48	6.51	6.83	6.98	7.23	7.12	6.93	6.82	6.59	6.54			
145	7.07	7.17	7.54	8.01	8.07	7.75	7.24	7.05	7.12	7.12	7.30	7.26	7.03	6.87	6.71	6.83			
150	7.99	8.04	8.20	8.40	8.34	8.13	7.84	7.70	7.92	7.97	8.20	8.21	8.11	8.01	8.04	8.00			
155	7.37	7.38	7.44	7.53	7.38	7.26	7.09	7.08	7.48	7.56	7.82	7.94	7.88	7.77	7.67	7.62			
160	5.83	5.76	5.72	5.79	5.50	4.53	4.94	5.56	6.20	6.28	6.53	6.72	6.72	6.64	6.47	6.34			
165	2.97	2.50	3.14	3.18	3.31	3.35	3.33	3.04	3.51	3.71	4.57	4.75	4.81	4.73	4.57	4.39			
170	1.43	1.47	1.40	1.36	1.29	1.45	1.50	1.43	1.92	1.98	2.42	2.57	2.62	2.57	2.46	2.30			
175	0.70	0.68	0.66	0.66	0.66	0.66	0.66	0.68	0.87	0.87	0.97	1.02	1.04	1.02	0.98	0.92			
180	0.66	0.66	0.66	0.67	0.67	0.67	0.67	0.63	0.66	0.66	0.66	0.67	0.67	0.67	0.67	0.67			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Oliver
 Test Date: 2025-12-25

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.428
 Humidity: 65.0%
 Test Distance: 2.472m [K=1.0000]
 Remarks: