


# Radiant

## FR-D2603-64L/A/C

64" Ceiling Fan

# MODERN FORMS SMART FANS

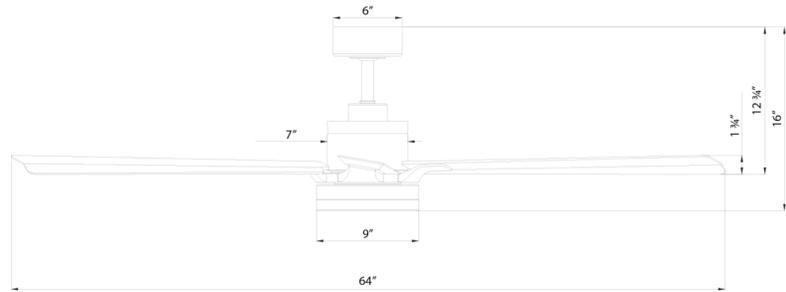

### PRODUCT DESCRIPTION

Modern Forms sets a new design standard with Radiant, a smart ceiling fan that redefines modern comfort through light, air, and artistry. Ambient up-lighting is seamlessly integrated into the design, marking a defining moment in ceiling fan innovation. Its advanced tunable LED system produces over 3000 lumens, creating a soft, architectural glow to illuminate the ceiling while a customizable downlight diffuser, available in alabaster, acrylic, or reclaimed K5 crystal casts gentle radiance below.

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control
- Optional wall control sold separately
- Compatible with myWAC app

### AIRFLOW/ENERGY EFFICIENCY

<b>Weighted-Average/High Airflow CFM:</b>	6194/9179
<b>Weighted-Average/High Energy Use (W):</b>	31/44.5
<b>Estimated Yearly Energy Cost (\$):</b>	9
<b>Weighted-Average/High Efficiency (CFM/W):</b>	200
<b>Max RPM:</b>	126

### ORDER NUMBER

Model	Housing	Blade
FR-D2603-56L	<b>MB</b> <i>Matte Black</i>	<b>DK</b> <i>Distressed Koa</i>
	<b>MB</b> <i>Matte Black</i>	<b>MB</b> <i>Matte Black</i>
	<b>MW</b> <i>Matte White</i>	<b>MW</b> <i>Matte White</i>

Example: FR-D2603-64L-MW (Acrylic), FR-D2603-56A-MW (Alabaster), FR-D2603-56C-MW (K5 Crystal)

\*Results may vary based on application and surroundings.

\*This fan comes uni-pack - blade select options are not available

### SPECIFICATIONS

<b>Construction:</b>	Aluminum, ABS
<b>Blade:</b>	10° Pitch, 64" sweep
<b>Downrod:</b>	3/4"W + 6"H included
<b>Mounting Slope:</b>	Up to 30°
<b>Wire:</b>	66" (with connectors)
<b>Hanging Weight:</b>	21.2 lbs
<b>Total Power:</b>	90.5W (120-240v)
<b>Standards:</b>	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
<b>Motor Type:</b>	153 x 20 sensorless DC motor

### WIRELESS PERFORMANCE

<b>Wi-Fi Range:</b>	Up to 150 ft*
<b>Bluetooth Range:</b>	Up to 150 ft

### LUMINAIRE PERFORMANCE

<b>Light Source:</b>	LED
<b>Light Wattage:</b>	30W
<b>Lumens:</b>	3749 - 3887 (Based on CCT)
<b>Dimming:</b>	Integrated
<b>CRI:</b>	90
<b>Color Temperature:</b>	2700K, 3000K, 3500K 4000K, 5000K selectable/tunable
<b>Rated Life:</b>	50,000 hours

### UPLIGHT PERFORMANCE

<b>Light Wattage:</b>	16W
<b>Uplight Lumens:</b>	898-1007
<b>Color Temperature:</b>	2700K, 3000K, 3500K 4000K, 5000K selectable/tunable
<b>Rated Life:</b>	50,000 hours
<b>Total Delivered Lumens:</b>	3088 (up and down-light)

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

**OPTIONAL ACCESSORIES**

Bluetooth Wall Control	<b>F4-WUCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control	<b>F4-RUCBT</b>	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Moder Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod	 <p><b>XF-12</b> 12IN  <b>XF-18</b> 18IN  <b>XF-24</b> 24IN  <b>XF-36</b> 36IN  <b>XF-48</b> 48IN  <b>XF-60</b> 60IN  <b>XF-72</b> 72IN</p>		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers	 <p><b>XF-I</b></p>		Connects two downrods together.
Sloped Ceiling Kit	 <p><b>XF-SCK</b></p>		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F4-WUCBT-WT**, Remote Control: **F4-RUCBT-WT**, Downrod: **XF-12-MB**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

**SUGGESTED DOWNROD HEIGHT USAGE**

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

**SLOPED CEILING DEGREE CONVERSION CHART**

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire