


WOODY

FR-W1814-60L

60" Ceiling Fan

MODERN FORMS

SMART FANS

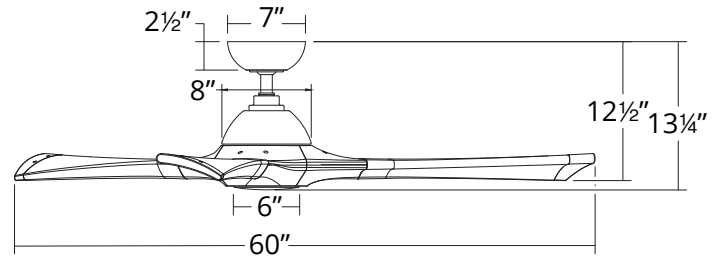

PRODUCT DESCRIPTION

With sturdy blades crafted from solid wood- properly treated to weather the outdoors- this smart fan is rugged refinement to the core. Take control of it with our exclusive Modern Forms app- features like Adaptive Learning make life easier every day by suggesting optimized schedules, while a powerful DC motor inside keeps things running smooth, quiet and up to 70% more efficient than traditional AC fans. Choose a bronze housing with dark walnut wood, matte black with distressed koa or graphite with weathered gray.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Optional light cover included
- Includes BT remote control
- Optional wall control is available
- Compatible with Modern Forms app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	5036/7306
Weighted-Average/High Energy Use (W):	18/31
Estimated Yearly Energy Cost (\$):	5
Weighted-Average/High Efficiency (CFM/W):	276/276
Max RPM:	145

ORDER NUMBER

Model	Housing	Blade
FR-W1814-60L	BZ <i>Bronze</i>	DW <i>Dark Walnut</i>
	GH <i>Graphite</i>	WG <i>Weathered Gray</i>
	MB <i>Matte Black</i>	DK <i>Distressed Koa</i>

Example: FR-W1814-60L-MB/DK

For 2700K add "-27" ; for 3500K add "-35" before the finish: FR-W1814-60L27MBDK

*Results may vary based on application and surroundings.

*This fan comes uni-pack - blade select options are not available



The Modern Forms app synchronizes seamlessly with smart home devices you already own



SPECIFICATIONS

Construction:	Aluminum, Paulownia
Blade:	13° Pitch, 60" sweep
Downrod:	.75"W x 4.5"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	19 lbs
Total Power:	32W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
Motor Type:	125 x 20 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	19.5W
Lumens/Delivered Lumens:	1600/846
Dimming:	Integrated
CRI:	90
Color Temperature:	3000K (2700K/3500K options available)
Rated Life:	50,000 hours

modernforms.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050






Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WOODY
FR-W1814-60L
 60" Ceiling Fan

MODERN FORMS
 SMART FANS

OPTIONAL ACCESSORIES

<p>Bluetooth Wall Control</p>		<p>F-WCBT</p>	<p>WT White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.</p>
<p>Bluetooth Remote Control</p>		<p>F-RCBT</p>	<p>WT White</p>	<p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.</p>
<p>Downrod</p>		<p>XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN</p>		<p>All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p>
<p>Downrod Couplers</p>		<p>XF-I</p>		<p>Connects two downrods together.</p>
<p>Sloped Ceiling Kit</p>		<p>XF-SCK</p>		<p>Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.</p>

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BN**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire