


ROBOTO

FR-W1910-62

62" Ceiling Fan

MODERN FORMS SMART FANS

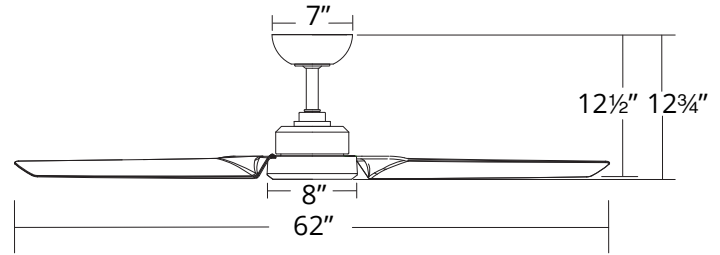

PRODUCT DESCRIPTION

Like all our smart fans, Roboto is Wet Rated to be perfect for indoor and outdoor applications. Two size options are available to complete any deck, pergola, room or living space. The quiet DC motor is 70% more efficient than AC motors, and our free Modern Forms app lets you control fan speed, set schedules, and integrate with smart home devices.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control
- Optional wall control sold separately
- Compatible with Modern Forms app

AIRFLOW/ENERGY EFFICIENCY

| | |
|--|-----------|
| Weighted-Average/High Airflow CFM: | 5612/7757 |
| Weighted-Average/High Energy Use (W): | 13/34 |
| Estimated Yearly Energy Cost (\$): | 4 |
| Weighted-Average/High Efficiency (CFM/W): | 211/188 |
| Max RPM: | 140 |

ORDER NUMBER

| Model | Housing | Blade |
|-------------|------------------------------------|------------------------------|
| FR-W1910-62 | BA <i>Brushed Aluminum</i> | TT <i>Titanium</i> |
| | MB <i>Matte Black</i> | MB <i>Matte Black</i> |
| | MW <i>Matte White</i> | MW <i>Matte White</i> |
| | OB <i>Oil Rubbed Bronze</i> | BZ <i>Bronze</i> |

Example: FR-W1910-62-MB

- *Results may vary based on application and surroundings.
- *This fan comes uni-pack - blade select options are not available



The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760





ROBOTO

FR-W1910-62

62" Ceiling Fan

MODERN FORMS SMART FANS

OPTIONAL ACCESSORIES

| | | | | |
|---------------------------------|---|--|------------------------|---|
| <p>Bluetooth Wall Control</p> |  | <p>F-WCBT</p> | <p>WT White</p> | <p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.</p> |
| <p>Bluetooth Remote Control</p> |  | <p>F-RCBT</p> | <p>WT White</p> | <p>Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.</p> |
| <p>Downrod</p> |  | <p>XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN</p> | | <p>All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.</p> |
| <p>Downrod Couplers</p> |  | <p>XF-I</p> | | <p>Connects two downrods together.</p> |
| <p>Sloped Ceiling Kit</p> |  | <p>XF-SCK</p> | | <p>Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.</p> |

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-BN**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

| Ceiling Height | 15' | 14' | 13' | 12' | 11' | 10' | 9' |
|----------------|-----|-----|-----|-----|-----|-----|-----|
| Downrod | 72" | 60" | 48" | 36" | 24" | 18" | 12" |

SLOPED CEILING DEGREE CONVERSION CHART

| Degree | 4-8° | 9-13° | 14-17° | 18-21° | 22-25° | 26-29° | 30-32° | 33-35° | 36-38° | 39-41° | 42-44° | 45° |
|---------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|
| Ceiling Slope | 1/12 | 2/12 | 3/12 | 4/12 | 5/12 | 6/12 | 7/12 | 8/12 | 9/12 | 10/12 | 11/12 | 12/12 |
| Pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch | pitch |

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire