



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



0 to 60

WS-56124

PRODUCT DESCRIPTION

An exquisite sense of simplicity that lends to its surroundings an even layer of energy-efficient illumination. This clean design blends Euro styling and functional technology suitable for flattering illumination. ADA Compliant. 3 CCTs are selectable to create the white light color temperature of your choice. Like a fast race car, this clean design is a versatile option that can be installed vertically, horizontally, or in any orientation.

FEATURES


- ACLED driverless technology
- Adjustable backplate offers flexible mounting and accommodates to off-center junction box locations
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model# LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Extruded aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

HDW-SY21-WA - Hardware Pack

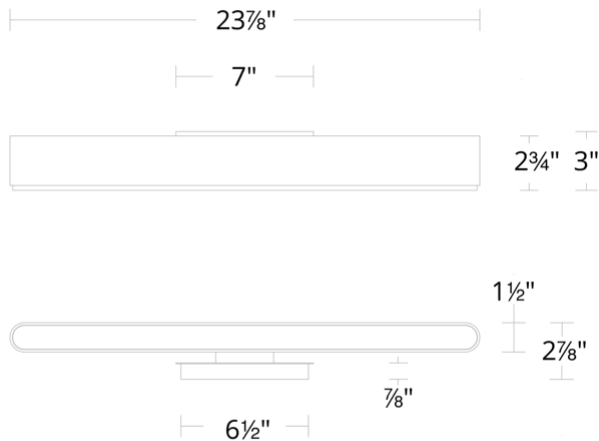

WS-56114

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-56124 24"	2700K	BK Black	10.3W	749	451
	2700K	BN Brushed Nickel	10.3W	749	451
	3000K	BK Black	10.3W	871	485
	3000K	BN Brushed Nickel	10.3W	871	485
	3500K	BK Black	10.3W	848	479
	3500K	BN Brushed Nickel	10.3W	848	479

Example: **WS-56124-35-BN**

For custom requests please contact customs@modernforms.com



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



0 to 60

WS-56137

PRODUCT DESCRIPTION

An exquisite sense of simplicity that lends to its surroundings an even layer of energy-efficient illumination. This clean design blends Euro styling and functional technology suitable for flattering illumination. ADA Compliant. 3 CCTs are selectable to create the white light color temperature of your choice. Like a fast race car, this clean design is a versatile option that can be installed vertically, horizontally, or in any orientation.

FEATURES


- ACLED driverless technology
- Adjustable backplate offers flexible mounting and accommodates to off-center junction box locations
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option available (special order), unit dimensions: 3.4" x 1.2" x 0.5" (model# LDS065M010AFE-LO1)

SPECIFICATIONS

Rated Life	60000 Hours
Standards	ETL, cETL, Damp Location Listed, Title 24 JA8: 2019 Compliant, ADA
Input	120 VAC, 50/60Hz
Dimming	ELV: 100-10%, TRIAC: 100-10%
Mounting	Can be mounted on wall in all orientations
Color Temp	3000K, 3500K, 2700K
CRI	90
Construction	Extruded aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

HDW-SY21-WA - Hardware Pack

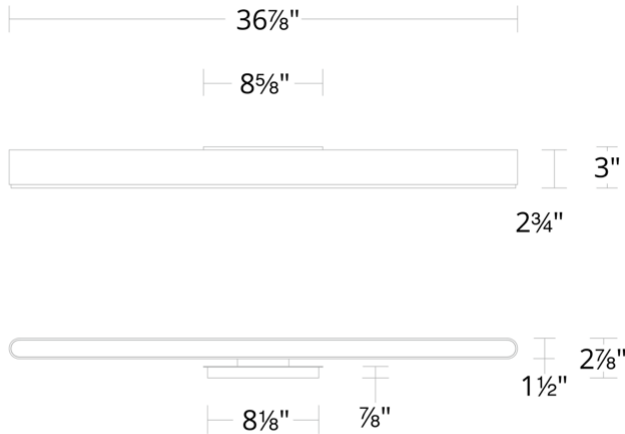

WS-56137

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-56137 37"	2700K	BK Black	16.3W	958	702
	2700K	BN Brushed Nickel	16.3W	958	702
	3000K	BK Black	16.3W	1158	774
	3000K	BN Brushed Nickel	16.3W	1158	774
	3500K	BK Black	16.3W	1087	750
	3500K	BN Brushed Nickel	16.3W	1087	750

Example: **WS-56137-35-BN**

For custom requests please contact customs@modernforms.com