



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Kilt

PD-44413S

PRODUCT DESCRIPTION


Hazy acrylic cones combine with crisp metal skirts on these pendants, which are installed on one canopy, creating an artful statement and delivering ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisan crafted hazy cloud acrylic
- Each unique piece lends itself to variations in milkiness
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 200 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Bent metal frame with decorative acrylic shade

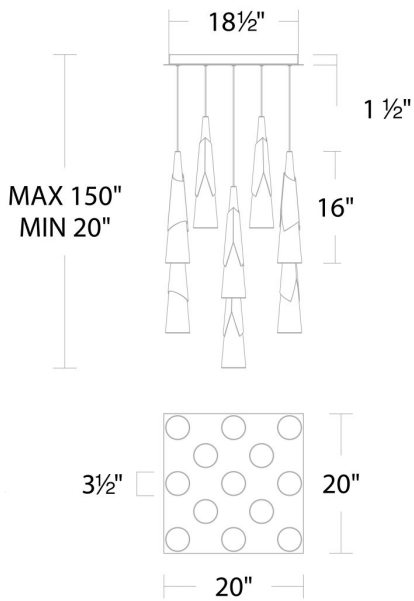

PD-44413S


Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-44413S 20" - 13 Lights	2700K/3000K/ 90 2700K/3000K/ 90	102.7W 102.7W	6006 6006	AB Aged Brass BK Black

Example: **PD-44413S-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right



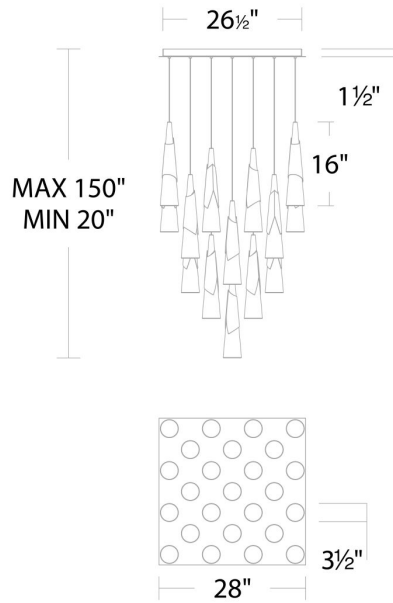

Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Kilt

PD-44425S

PRODUCT DESCRIPTION

Hazy acrylic cones combine with crisp metal skirts on these pendants, which are installed on one canopy, creating an artful statement and delivering ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisan crafted hazy cloud acrylic
- Each unique piece lends itself to variations in milkiness
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 200 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Bent metal frame with decorative acrylic shade

PD-44425S

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-44425S 28" - 25 Lights	2700K/3000K/	198.5W	10542	AB Aged Brass
	90	198.5W	10542	BK Black
	2700K/3000K/			
	90			

Example: **PD-44425S-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right





Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Kilt

PD-44441S

PRODUCT DESCRIPTION


Hazy acrylic cones combine with crisp metal skirts on these pendants, which are installed on one canopy, creating an artful statement and delivering ample lighting to spaces throughout a home or business.

FEATURES

- Driver concealed within the canopy
- Artisan crafted hazy cloud acrylic
- Each unique piece lends itself to variations in milkiness
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 75 lbs., 125 lbs., and 200 lbs. respectfully, or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Bent metal frame with decorative acrylic shade

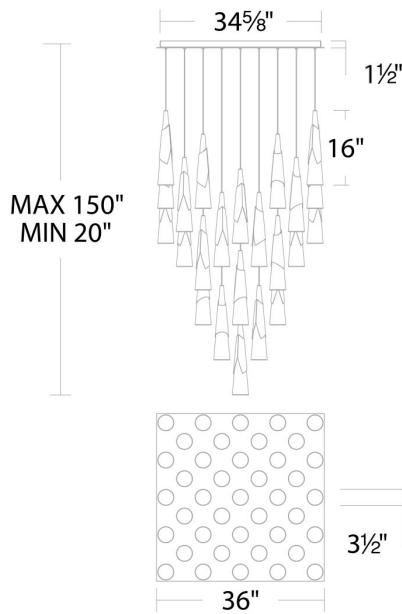

PD-44441S

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-44441S 36" - 41 Lights	2700K/3000K/ 90 2700K/3000K/ 90	325.4W 325.4W	18018 18018	AB Aged Brass BK Black

Example: **PD-44441S-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

