



Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Diver

PL-38518

PRODUCT DESCRIPTION


Using a minimalist design, the Diver picture light provides uniform, color temperature selectable LED illumination that enhances artwork. A refined rectangular backplate mounts elegantly to the wall, while the slim head can be angled to direct a soft, sweeping glow over the piece.

FEATURES

- Driver concealed within the canopy
- Light source rotates 90 degrees
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	4000K, 3500K, 3000K, 2700K
CRI	90
Construction	Aluminum frame with acrylic diffuser

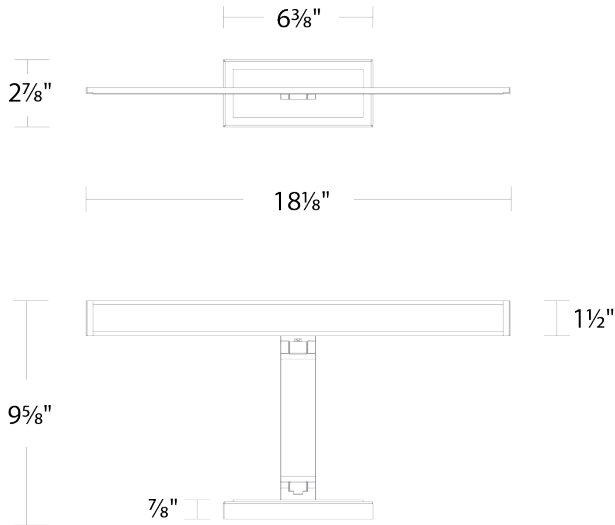

PL-38518

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-38518 18"	2700K	AB Aged Brass	10.9W	638	371
	2700K	BK Black	10.9W	638	371
	3000K	AB Aged Brass	10.9W	643	374
	3000K	BK Black	10.9W	643	374
	3500K	AB Aged Brass	10.9W	645	376
	3500K	BK Black	10.9W	645	376
	4000K	AB Aged Brass	10.9W	647	378
	4000K	BK Black	10.9W	647	378

Example: **PL-38518-40-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right





Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Diver

PL-38524

PRODUCT DESCRIPTION


Using a minimalist design, the Diver picture light provides uniform, color temperature selectable LED illumination that enhances artwork. A refined rectangular backplate mounts elegantly to the wall, while the slim head can be angled to direct a soft, sweeping glow over the piece.

FEATURES

- Driver concealed within the canopy
- Light source rotates 90 degrees
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	4000K, 3500K, 3000K, 2700K
CRI	90
Construction	Aluminum frame with acrylic diffuser

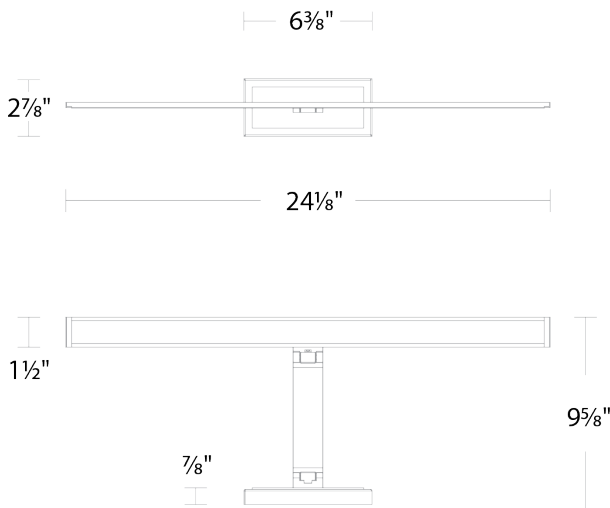

PL-38524

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-38524 24"	2700K	AB Aged Brass	14.7W	914	520
	2700K	BK Black	14.7W	914	520
	3000K	AB Aged Brass	14.7W	926	530
	3000K	BK Black	14.7W	926	530
	3500K	AB Aged Brass	14.7W	932	535
	3500K	BK Black	14.7W	932	535
	4000K	AB Aged Brass	14.7W	936	540
	4000K	BK Black	14.7W	936	540

Example: **PL-38524-40-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right





Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Diver

PL-38530

PRODUCT DESCRIPTION


Using a minimalist design, the Diver picture light provides uniform, color temperature selectable LED illumination that enhances artwork. A refined rectangular backplate mounts elegantly to the wall, while the slim head can be angled to direct a soft, sweeping glow over the piece.

FEATURES

- Driver concealed within the canopy
- Light source rotates 90 degrees
- Conversion plate included to accommodate 4" junction box
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# MKCP-3040-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277 VAC, 50/60Hz
Dimming	ELV, 0-10V, TRIAC, WAC Home*
Color Temp	4000K, 3500K, 3000K, 2700K
CRI	90
Construction	Aluminum frame with acrylic diffuser

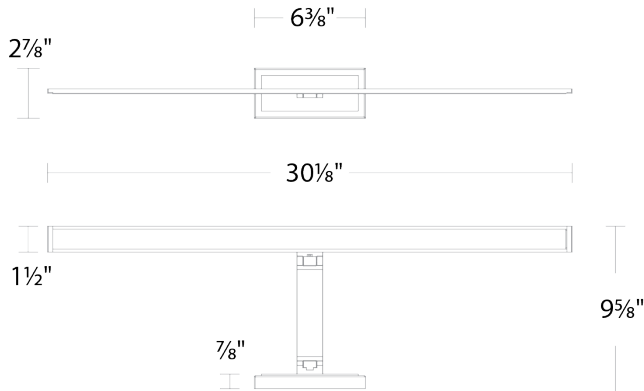

PL-38530

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PL-38530 30"	2700K	AB Aged Brass	20.8W	1390	843
	2700K	BK Black	20.8W	1390	843
	3000K	AB Aged Brass	20.8W	1365	852
	3000K	BK Black	20.8W	1365	852
	3500K	AB Aged Brass	20.8W	1373	854
	3500K	BK Black	20.8W	1373	854
	4000K	AB Aged Brass	20.8W	1372	857
	4000K	BK Black	20.8W	1372	857

Example: **PL-38530-40-BK**

For custom requests please contact customs@modernforms.com

* WAC Home components required for tunable white or Dim-to-Warm mode. See WAC Home section on website for additional information or use QR code on the right

